




PVC Hose & Assemblies

Reinforced PVC Hose Assemblies

Schrader Standard Series Interchange.
(See page 290 for Coupling Specification).

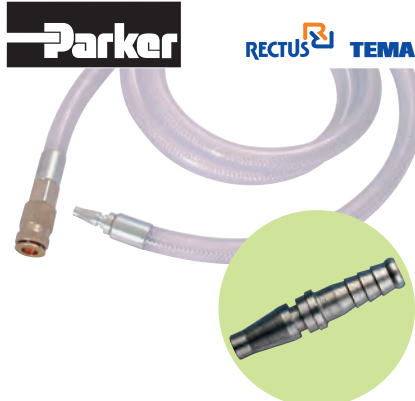

Rectus 17 Series Hose Assemblies

1710	L mtrs	ID	£
HOSE17/06MM/3M	3	1/4"	31.35
HOSE17/06MM/5M	5	1/4"	32.60
HOSE17/06MM/10M	10	1/4"	35.20
HOSE17/10MM/3M	3	3/8"	22.95
HOSE17/10MM/5M	5	3/8"	34.85
HOSE17/10MM/10M	10	3/8"	26.95
HOSE17/12MM/3M	3	1/2"	24.80
HOSE17/12MM/5M	5	1/2"	26.20
HOSE17/12MM/10M	10	1/2"	29.70

• Twist release type coupling.
Schrader Standard Series Interchange.
(See page 287 for Coupling Specification).



AP97 Series Hose Assemblies

0097	L mtrs	ID	£
HOSE97/06MM/3M	3	1/4"	24.50
HOSE97/06MM/5M	5	1/4"	27.70
HOSE97/06MM/10M	10	1/4"	33.60
HOSE97/10MM/3M	3	3/8"	29.90
HOSE97/10MM/5M	5	3/8"	32.35
HOSE97/10MM/10M	10	3/8"	40.75
HOSE97/12MM/3M	3	1/2"	27.90
HOSE97/12MM/5M	5	1/2"	30.65
HOSE97/12MM/10M	10	1/2"	40.10

PCL Standard Series Interchange.
(See page 293 for Coupling Specification).



Rectus 19 Series Hose Assemblies

1910	L mtrs	ID	£
HOSE19/06MM/3M	3	1/4"	18.95
HOSE19/06MM/5M	5	1/4"	20.20
HOSE19/06MM/10M	10	1/4"	23.15
HOSE19/10MM/3M	3	3/8"	21.15
HOSE19/10MM/5M	5	3/8"	23.05
HOSE19/10MM/10M	10	3/8"	26.95
HOSE19/12MM/3M	3	1/2"	17.95
HOSE19/12MM/5M	5	1/2"	28.40
HOSE19/12MM/10M	10	1/2"	33.90


Cejn 320 Series Interchange.
(See page 300 for Coupling Specification).



Rectus 25 Series Hose Assemblies

2510	L mtrs	ID	£
HOSE25/06MM/3M	3	1/4"	16.45
HOSE25/06MM/5M	5	1/4"	17.05
HOSE25/06MM/10M	10	1/4"	27.55
HOSE25/10MM/3M	3	3/8"	17.95
HOSE25/10MM/5M	5	3/8"	27.65
HOSE25/10MM/10M	10	3/8"	32.10
HOSE25/12MM/3M	3	1/2"	30.45
HOSE25/12MM/5M	5	1/2"	32.60
HOSE25/12MM/10M	10	1/2"	37.75

Clear Un-Reinforced PVC Hose, Type CPVC

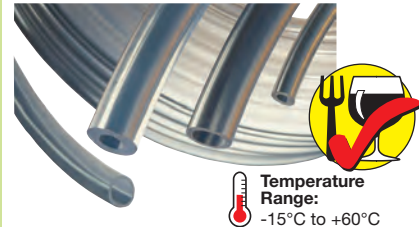

Temperature Range: -15°C to +60°C

Standard Coil Length: 30 Metres

Manufactured from top quality crystal clear "virgin" PVC compound, this hose is ideal for conveying fluids, gases, powders and granules at low pressure. Full chemical resistance information is available from our Business Development Team.

All the hoses are made from USF and DA approved material, suitable for food and drink.

All materials used have FDA & BGA, UK S.I. No.1523 & EEC Directive 78/142/EEC Approval for use in food contact applications.

Please note: No recommended burst pressures/working pressures due to hose being unreinforced.

Light Duty, 30 Metre Coils

5000	ID (mm)	ID	OD (mm)	£
CPVC18/15	3	1/8"	5	14.45
CPVC532/10	4	5/32"	6	16.45
CPVC316/15	5	3/16"	7	19.10
CPVC14/15	6	1/4"	8	20.20
CPVC516/15	8	5/16"	11	41.80
CPVC38/15	9	3/8"	12	42.55
CPVC12/15	12	1/2"	15	59.55
CPVC58/15	16	5/8"	18	184.90
CPVC34/15	19	3/4"	22.5	105.80

Medium Duty, 30 Metre Coils

5000	ID (mm)	ID	OD (mm)	£
CPVC5/11	5	3/16"	11	74.35
CPVC6/12	6	1/4"	12	75.00
CPVC8/14	8	5/16"	14	88.90
CPVC10/16	10	3/8"	16	109.45
CPVC12/18	12	1/2"	18	150.25
CPVC16/22	16	5/8"	22	148.20
CPVC19/25	19	3/4"	25	200.10
CPVC25/31	25	1"	31	227.70

Internal Tube Supports

• This internal tube support, will prevent the tube from crushing caused by over tightening of compression type fittings or clamps.

1000	To Suit Hose I.D. (mm)	£
877-0004	4	0.65
877-0006	6	0.65
877-0008	8	0.80
877-0009	9	0.90
877-0010	10	0.90
877-0012	12	1.05
877-0013	13	1.05