



Polyurethane Tube



Tech Sheet 3132

Metric Polyurethane Ether Tube




Temperature Range:
-40°C to +70°C

Vacuum rating 28" Hg.
• Safety Factor of 3 to 1.

Ether based tube has a greater durability to water and high humidity environments.

- PUET air line tubing is made from 95A shore durometer, ether-based polyurethane and is an excellent choice for compressed air systems.
- Kink & abrasion resistant.
- Resistant to chemicals, water, fuel & oil.
- Outstanding flexibility & memory.

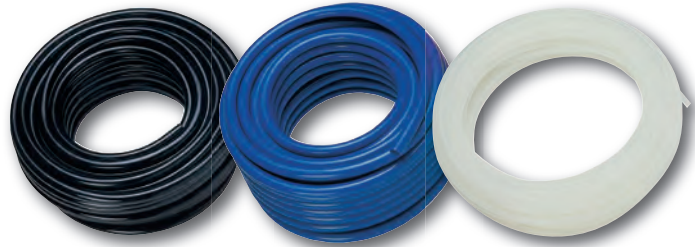

Metric, 25 Metre Coils


5030	OD mm	ID mm	Color	PSI	£
PUET04/025N-25	4	2.5	Black	156	22.80
PUET04/025B-25	4	2.5	Blue	156	22.80
PUET04/025-25	4	2.5	Transparent	156	22.80
PUET05/030N-25	5	3	Black	171	31.60
PUET05/030B-25	5	3	Blue	171	31.60
PUET05/030-25	5	3	Transparent	171	31.60
PUET06/040N-25	6	4	Black	142	37.20
PUET06/040B-25	6	4	Blue	142	37.20
PUET06/040-25	6	4	Transparent	142	37.20
PUET08/055N-25	8	5.5	Black	114	56.00
PUET08/055B-25	8	5.5	Blue	114	56.00
PUET08/055-25	8	5.5	Transparent	114	56.00
PUET10/070N-25	10	7	Black	114	79.90
PUET10/070B-25	10	7	Blue	114	79.90
PUET10/070-25	10	7	Transparent	114	79.90
PUET12/080N-25	12	8	Black	128	119.00
PUET12/080B-25	12	8	Blue	128	119.00
PUET12/080-25	12	8	Transparent	128	119.00

Metric, 100 Metre Coils

5030	OD mm	ID mm	Color	PSI	£
PUET04/025N-100	4	2.5	Black	156	63.30
PUET04/025B-100	4	2.5	Blue	156	63.30
PUET04/025-100	4	2.5	Transparent	156	63.30
PUET06/040N-100	6	4	Black	142	120.70
PUET06/040B-100	6	4	Blue	142	120.70
PUET06/040-100	6	4	Transparent	142	120.70
PUET08/055N-100	8	5.5	Black	114	198.05
PUET08/055B-100	8	5.5	Blue	114	198.05
PUET08/055-100	8	5.5	Transparent	114	198.05
PUET10/070N-100	10	7	Black	114	295.35
PUET10/070B-100	10	7	Blue	114	295.35
PUET10/070-100	10	7	Transparent	114	295.35
PUET12/080N-100	12	8	Black	128	458.85
PUET12/080B-100	12	8	Blue	128	458.85
PUET12/080-100	12	8	Transparent	128	458.85

Tech Sheet 3133

Blow Guns & Polyurethane Coil Assemblies, Red

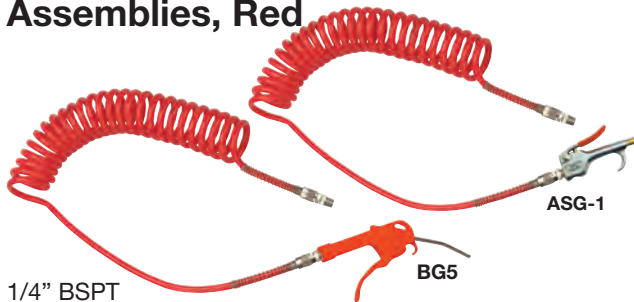


1/4" BSPT

5030	OD mm	ID mm	W (mtrs)	Blow Gun Type	£
2027-3967	6	4	2	ASG-1	26.80
2027-3975	6	4	4	ASG-1	29.55
2027-4007	6	4	2	BG5	26.55
2027-4015	6	4	4	BG5	29.25
2027-4023	10	6.5	2	ASG-1	24.35
2025-2763	10	6.5	4	ASG-1	38.05
2027-4049	10	6.5	6	ASG-1	45.05
2027-4056	10	6.5	2	BG5	30.65
2027-4064	10	6.5	4	BG5	37.75
2027-4072	10	6.5	6	BG5	44.70

Polyurethane Recoil Twin Hose



Temperature Range:
-20°C to +70°C

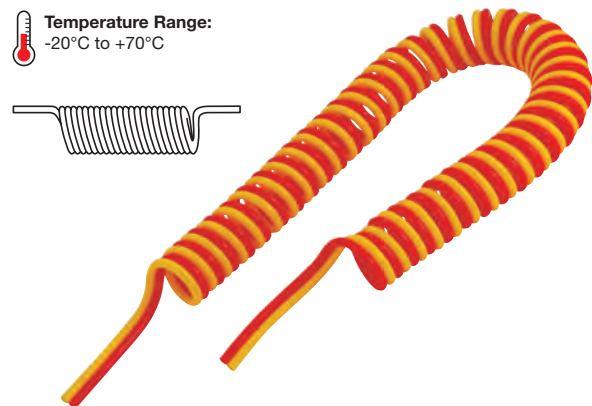

Red/Yellow

0306	OD mm	ID mm	W (mtrs)	£
TWIN80505RY	8	5	2.5	30.75
TWIN10656RY	10	6.5	3	44.00
TWIN12806RY	12	8	3	56.35