



Polyurethane Anti-spatter Tube & Hose



Polyurethane Anti-spatter Tube

This PVC/Polyurethane, alloy tubing has been developed by taking 98A durometer polyurethane as the inner tube and jacketing it with a specially formulated flame retardant cover. The jacket protects the tubing from incidental contact with weld spatter. High abrasion resistance. Non-marking cover. Good flexibility over a wide temperature range. Excellent fitting retention at elevated temperatures.

Transfer of air and water. Induction welding tubing lines. Injection moulding cooling lines. Transfer of deionised water. Robotic and pneumatic air lines. Automotive assembly lines. Safety Factor of 3 to 1.

Temperature Range:
-40°C to +70°C



Anti-spatter Tube, 50 Metre Coils

0306	OD mm	ID mm	PSI	mm	£	
S604050MBU	6	4	Blue	145	20	110.80
S604050MGY	6	4	Grey	145	20	110.80
S604050MY	6	4	Yellow	145	20	110.80
S805050MBU	8	5	Blue	160	30	178.30
S805050MGY	8	5	Grey	160	30	178.30
S805050MY	8	5	Yellow	160	30	178.30
S106550MBU	10	6.5	Blue	145	35	245.20
S106550MGY	10	6.5	Grey	145	35	245.20
S106550MY	10	6.5	Yellow	145	35	245.20
S128050MBU	12	8	Blue	130	45	323.90
S128050MGY	12	8	Grey	130	45	323.90
S128050MY	12	8	Yellow	130	45	323.90

Polyurethane Anti-spatter Recoil Hose

Temperature Range:
-40°C to +70°C

Safety Factor of 3 to 1.




Blue, Anti-spatter Recoil Hose, 4 Metre Coils, 1/4" BSPT

0306	OD mm	ID mm	PSI	mm	£
SC60404MBU	6	4	145	15	25.90
SC80504MBU	8	5	160	20	35.70
SC10654MBU	10	6.5	145	30	44.60

Tube & Hose Cutters



Tube Cutter

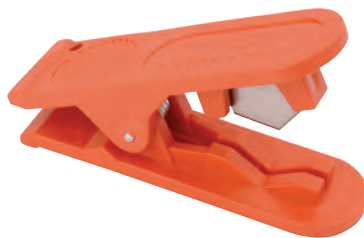

5100	Red	£
PXC058		6.80

Tube/Hose Cutters



5100	OD mm	£
LBS-25	3 - 25	21.30
LBS-120	6 - 35	42.30
LBS-63N	6 - 63	77.45