




High Density Polyethylene Tube

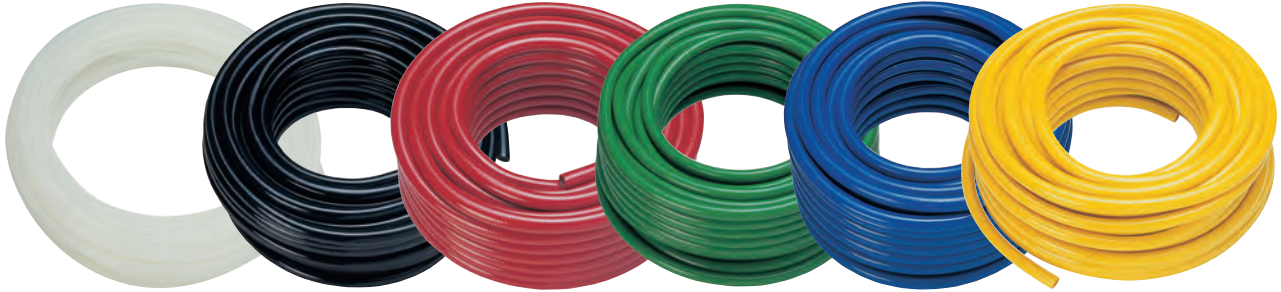

This High Density Polyethylene tubing is lightweight and has excellent impact resistance. Its high tensile strength and low moisture absorption makes it excellent for demanding industrial applications.

The recommended maximum working pressure at 20°C is 16 bar.

Metric High Density Polyethylene Tube

PN16, 100 Metre Coils

1050	OD mm	mm		£
14020046101	6	0.8	White	70.85
14020046102	6	0.8	Black	70.85
14020046106	6	0.8	Red	70.85
14020046107	6	0.8	Green	70.85
14020046108	6	0.8	Blue	70.85
14020046109	6	0.8	Yellow	70.85
14020048101	8	1	White	88.00
14020048102	8	1	Black	88.00
14020048106	8	1	Red	88.00
14020048107	8	1	Green	88.00
14020048108	8	1	Blue	88.00
14020048109	8	1	Yellow	88.00

PN24, 100 Metre Coils

1050	OD mm	mm		£
14010046102	6	0.8	Black	76.50
14010048102	8	1	Black	91.75

Imperial High Density Polyethylene Tube

PN16, 100 Metre Coils

1050	OD	Imp		£
14020004101	1/4"	0.035"	White	65.45
14020004102	1/4"	0.035"	Black	65.45
14020004106	1/4"	0.035"	Red	65.45
14020004107	1/4"	0.035"	Green	65.45
14020004108	1/4"	0.035"	Blue	65.45
14020004109	1/4"	0.035"	Yellow	65.45
14020005101	5/16"	0.039"	White	76.50
14020005102	5/16"	0.039"	Black	76.50
14020005106	5/16"	0.039"	Red	76.50
14020005107	5/16"	0.039"	Green	76.50
14020005108	5/16"	0.039"	Blue	76.50
14020005109	5/16"	0.039"	Yellow	76.50

PN24, 100 Metre Coils

1050	OD	Imp		£
14010004102	1/4"	0.035"	Black	76.50
14010005102	5/16"	0.039"	Black	91.75

Hydraulics

Hydraulic QRC

Pneumatic QRC

Ind. Air Prep., Monitor & Test

KELM™ Pneumatics

Pneumatic & Vacuum Equipment

Valves

Ring Main Systems

Adaptors & Fittings

Stainless Steel

Malleable Iron

Hose, Tubing & Couplings

Clamps & Clips

Sprays & Adhesives

Blow Guns & Vacuum

Wash Down & Fuelling

Air Tools

Tools, Hardware & PPE

Customers who bought from this page also purchased **Nylon Fittings** – see pages 964-967

