



Automotive Tubing & Hose

Airbrake Tubing DIN 74324

Temperature Range: -20°C to +70°C




- Manufactured from heat and light stabilised polyamide. This tube has excellent low density, low water absorption, physical properties and dimensions relatively constant even during humidity changes.
- Other colours available on request, minimum order of 20 x 30 metre coils.

30 Metre Coils

5040	OD mm	ID mm	bar	£
AB4230	4	2	Black 45	21.70
AB6430	6	4	Black 27	44.25
AB8630	8	6	Black 19	60.15
AB10830	10	8	Black 15	82.70
AB10730	10	7	Black 19	105.40
AB12930	12	9	Black 19	131.15
AB161230	16	12	Black 19	207.50
AB181430	18	14	Black 17	202.75

Nylon 12 Airbrake Coils, DIN 73378, SAE J 844 Type B

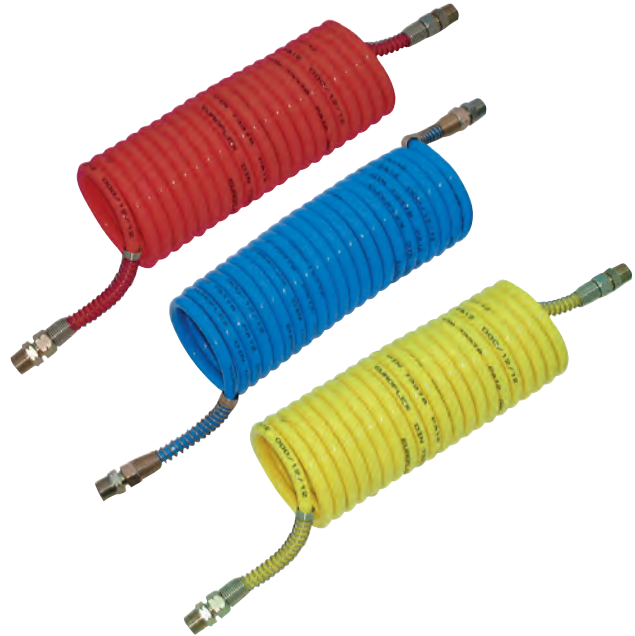

- Low moisture absorption.
- Excellent resistance to a wide range of chemicals.

Temperature Range: -40°C to +80°C

Red, Emergency Line, 1/2" BSPT

0306	OD mm	ID mm	-mtrs-	£
AB129035R	12	9	3.5 16	54.30
AB129050R	12	9	5 22	66.05

Blue, Auxiliary Line, 1/2" BSPT

0306	OD mm	ID mm	-mtrs-	£
AB129035B	12	9	3.5 16	54.30
AB129050B	12	9	5 22	66.05

Yellow, Service Line, 1/2" BSPT

0306	OD mm	ID mm	-mtrs-	£
AB129035Y	12	9	3.5 16	54.30
AB129050Y	12	9	5 22	66.05

- Hydraulics
- Hydraulic QRC
- Pneumatic QRC
- Ind. Air Prep., Monitor & Test
- KELM™ Pneumatics
- Pneumatic & Vacuum Equipment
- Valves
- Ring Main Systems
- Adaptors & Fittings
- Stainless Steel
- Malleable Iron
- Hose, Tubing & Couplings
- Clamps & Clips
- Sprays & Adhesives
- Blow Guns & Vacuum
- Wash Down & Fuelling
- Air Tools
- Tools, Hardware & PPE