



Layflat Hose



Layflat Delivery Hose

Applications: Conveyance and discharge of water etc. Particularly suitable for irrigation and water supply applications. However, can also be used in general industries, civil and construction engineering.




Pressures: Values given are based on the short term burst pressure of the hose at 20°C based on a 3:1 safety factor.

This product is only suitable for open ended discharge applications. Pressure ratings are based on discharge pressure from the pump unit.

Note: Any increase in temperature above 20°C will result in a decline in working pressure values.

Chemical Resistance: Resistant to the oils and greases as above. These hoses are not suitable for use with benzene, petrol, spirits, xylol, toluol or solvents containing aromatics. For more detailed information please contact technical sales.

Temperature Range:
-15°C to +55°C

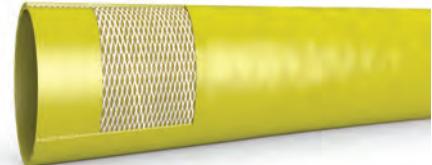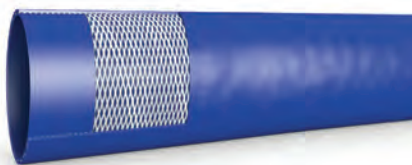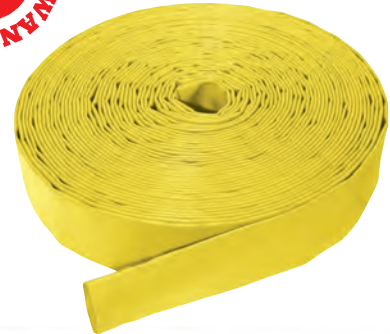

Hydraulics

Hydraulic QRC

Pneumatic QRC

Ind. Air Prep., Monitor & Test

KELIM™ Pneumatics

Pneumatic & Vacuum Equipment

Valves

Ring Main Systems

Adaptors & Fittings

Stainless Steel

Malleable Iron

Hose, Tubing & Couplings

Clamps & Clips

Sprays & Adhesives

Blow Guns & Vacuum

Wash Down & Fuelling

Air Tools

Tools, Hardware & PPE

Blue, 10 Metre Coils

5993	ID	ID mm	OD mm	bar	£
LFH114-10	1.1/4"	32	34.4	4.5	25.40
LFH112-10	1.1/2"	38	40.4	4.5	31.10
LFH2-10	2"	51	53.4	4.5	37.10
LFH212-10	2.1/2"	64	66.8	4.5	44.45
LFH3-10	3"	76	78.8	4.5	51.05
LFH4-10	4"	102	105.2	4.5	83.25
LFH6-10	6"	150	153.2	4.5	144.15
LFH8-10	8"	200	203.4	4.5	252.15

Blue, 100 Metre Coils

5993	ID	ID mm	OD mm	bar	£
LFH1-100	1"	25	27.4	4.5	222.55
LFH114-100	1.1/4"	32	34.4	4.5	222.75
LFH112-100	1.1/2"	38	40.4	4.5	270.50
LFH2-100	2"	51	53.4	4.5	322.70
LFH212-100	2.1/2"	64	66.8	4.5	386.35
LFH3-100	3"	76	78.8	4.5	443.85
LFH4-100	4"	102	105.2	4.5	723.70
LFH6-100	6"	150	153.2	4.5	1253.20
LFH8-100	8"	200	203.4	4.5	2192.85

Yellow, 100 Metre Coils

5993	ID	ID mm	OD mm	bar	£
YLH-1	1"	25	27.4	6	233.70
YLH-114	1.1/4"	32	34.4	6	250.65
YLH-112	1.1/2"	38	40.4	6	284.00
YLH-2	2"	51	54.8	6	339.00
YLH-3	3"	76	80.2	6	466.10
YLH-4	4"	102	106.6	6	759.80
YLH-5	5"	127	132	6	1138.60
YLH-6	6"	152	157.4	6	1315.80
YLH-8	8"	203	208.4	6	1443.80



Layflat Hose Couplings

Male

6000	To Suit Hose I.D.	£
LMC-1	1"	3.70
LMC-114	1.1/4"	4.15
LMC-112	1.1/2"	4.40
LMC-2	2"	5.05
LMC-212	2.1/2"	4.80
LMC-3	3"	6.95
LMC-4	4"	7.70
LMC-5	5"	10.70

Female

6000	To Suit Hose I.D.	£
LFC-1	1"	3.70
LFC-114	1.1/4"	4.15
LFC-112	1.1/2"	4.40
LFC-2	2"	5.05
LFC-212	2.1/2"	4.80
LFC-3	3"	6.95
LFC-4	4"	7.70
LFC-5	5"	10.70

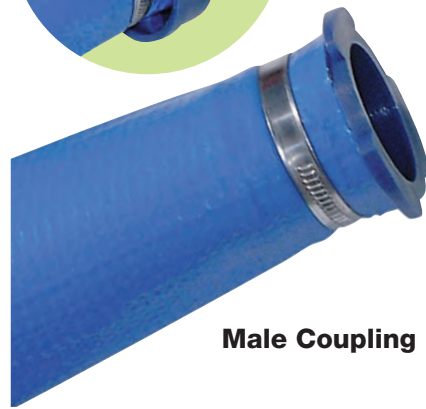

Female Coupling



Male Coupling

Please Note:
Two items are needed to make a coupling set.