



## Hozelock Tricoflex




### Tricoflat PVC

This product is only suitable for open ended discharge applications only. Pressure ratings are based on discharge pressure from the pump unit.

**Application:**

- Water Irrigation

**Working Temperature:**  
-15°C up to +60°C Max

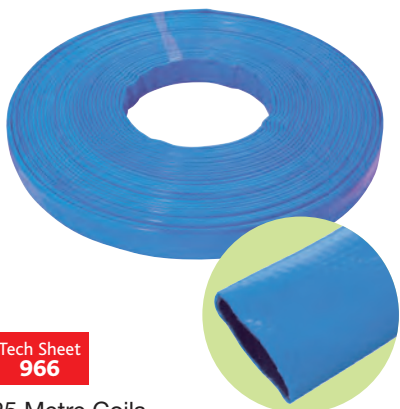

Tech Sheet 966

25 Metre Coils

	5080	ID (mm)	bar	bar	(mm)	£
TRI-140602	25	12	36	1.8	193.95	
TRI-140631	32	10	30	1.8	241.15	
TRI-140005	35	8	24	1.8	279.95	
TRI-140027	40	8	24	2	318.40	
TRI-140054	45	8	24	2	332.70	
TRI-140070	52	8	24	2	409.20	
TRI-140109	55	8	24	2	375.80	
TRI-140125	63	8	24	2.3	552.60	
TRI-140154	70	8	24	2.3	483.00	
TRI-140183	76	8	24	2.3	589.90	
TRI-140212	90	8	24	2.5	554.90	
TRI-140241	102	8	24	2.7	848.40	
TRI-140676	203	2.5	8	3	1491.20	

### Thermoclean 100, 15 bar

**Bursting Pressure:** at 23°C = 30 bar

**Application:**

- Food Quality Industrial Cleaning
- Grease and Cleaning Agent Resistant

**Working Temperature:**  
-15°C up to +100°C Max

**Maximum Working Pressure:**  
100°C 15 bar



Tech Sheet 890

Blue, 20 Metre Coils

	5080	ID (mm)	OD (mm)	(mm)	£
TRI-145571	13	22	4.5	312.80	
TRI-145655	16	25	4.5	366.15	
TRI-145671	19	28	4.5	425.30	
TRI-145597	25	35	5	504.75	

### Supertricoflat PVC

**Application:**

- Water Irrigation

This product is only suitable for open ended discharge applications only. Pressure ratings are based on discharge pressure from the pump unit.



Tech Sheet 966

Red, 25 Metre Coils

	5080	ID (mm)	bar	bar	(mm)	£
TRI-140296	40	17	51	3	458.10	
TRI-140357	52	16	48	3	525.15	
TRI-140386	55	16	48	2.9	555.50	
TRI-140402	63	16	48	2.3	692.35	
TRI-140457	76	12	36	3.3	927.70	
TRI-140544	153	7	21	4.3	2657.10	

### Thermoclean AL20, 20 bar

**Bursting Pressure:** at 23°C = 100 bar

**Application:**

- Food Quality Industrial Cleaning
- Grease and Cleaning Agent Resistant

**Working Temperature:**  
-15°C up to +70°C Max

**Maximum Working Pressure:**  
70°C 20 bar



Tech Sheet 889

Blue, 25 Metre Coils

	5080	ID (mm)	OD (mm)	(mm)	£
TRI-100236	12	20	4	246.70	
TRI-100284	19	28	5	450.80	

### Super Nobelair Soft PVC

**Application:**

- Compressed Air

**Bursting Pressure:** at 23°C = 60 bar

50 metre coils available upon request.

**Working Temperature:**  
-20°C up to +60°C

**Maximum Working Pressure:**  
23°C 15 bar



Tech Sheet 967

Blue, 25 Metre Coils

	5080	ID (mm)	OD (mm)	(mm)	£
TRI-148362	6.3	11	2.35	98.15	
TRI-148375	8	13	2.5	114.55	
TRI-148388	9	14.5	2.75	125.15	
TRI-148391	10	15.5	2.75	144.60	
TRI-147959	12.7	19	3.15	177.60	
TRI-158075	19	26.5	3.75	261.35	
TRI-158091	25	33.5	4.25	416.95	



Customers who bought from this page also purchased **Combination Steel Nipples and Hose Joiners** – see page 1243

