




Wash Down Equipment




Extended Lances, 1/4" BSPT Male Inlet/Outlet

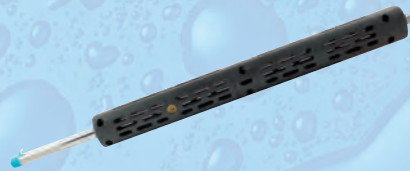

Max Temperature: 150°C **Max Pressure:** 280

Straight Vented Grip, 30 lpm

1369	L mm	£
BD-20	500	20.75
BD-25	635	22.90
BD-30	760	24.70
BD-36	900	27.25

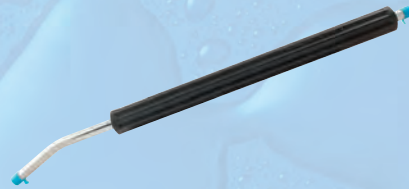


Max Temperature: 150°C **Max Pressure:** 280

Angled Moulded Grip, 45 lpm

1369	L mm	£
CDBJ-20	500	17.30
CDBJ-25	635	19.40
CDBJ-30	760	21.60
CDBJ-36	900	24.20


Extended Lances, 1/4" Male Inlet x M22 Female Outlet

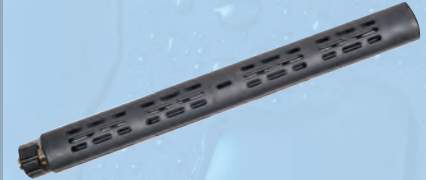

Max Temperature: 90°C **Max Pressure:** 250

Straight Vented Grip, 80 lpm

1369	L mm	£
BA-16	405	26.80
BA-18	457	27.70
BA-20	508	28.60

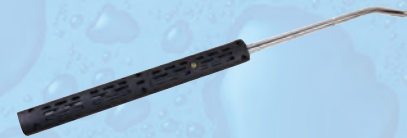

Max Temperature: 150°C **Max Pressure:** 280

Angled Vented Grip, 45 lpm

1369	L mm	£
CDBB-20	500	21.10
CDBB-25	635	23.35
CDBB-30	760	25.10
CDBB-36	900	27.70



Max Temperature: 80°C **Max Pressure:** 280

Angled Twin Moulded Grip, 30 lpm


1369	L mm	£
CDBU-42	1065	34.10
CDBU-47	1190	36.35
CDBU-50	1270	37.85



Max Temperature: 150°C **Max Pressure:** 280

Straight Moulded Grip, 45 lpm

1369	L mm	£
BC-13	330	19.40
BC-15	380	20.30
BC-18	457	21.60
BC-20	508	22.55

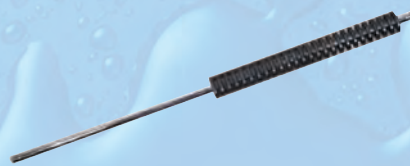

Max Temperature: 150°C **Max Pressure:** 280

Straight Moulded Grip, 45 lpm

1369	L mm	£
BMG-20	500	14.70
BMG-25	635	16.70
BMG-30	760	18.90
BMG-36	900	21.45



Max Temperature: 150°C **Max Pressure:** 280

Straight Twin Moulded Grip, 80 lpm

1369	L mm	£
CDBV-42	1065	28.60
CDBV-47	1190	30.65
CDBV-50	1270	32.00

M22 Extension & Nozzle



Max Temperature: 60°C **Max Pressure:** 150

Adjustable M22 Male Extension, 25 lpm

1369	L mm	£
CDBL-15	375	27.25