



# Hydraulic Directional Control Valves

EAT-N | Vickers


Page Tech Sheet **3111**

## CETOP3 Double Solenoid Directional Control Valves

Max flow rates upto 80 l/min.  
Mounting Interface:  
ISO 4401 Size 3.  
ANSI/B93.7M Size 3.  
CETOP RP6SH Size 3.  
DIN 24340 (NG6).

**Temperature Limits:**  
Min -20°C (-4°F)  
Max +70°C (+150°F)

**Max Pressure:**  
350 bar (5075 psi)

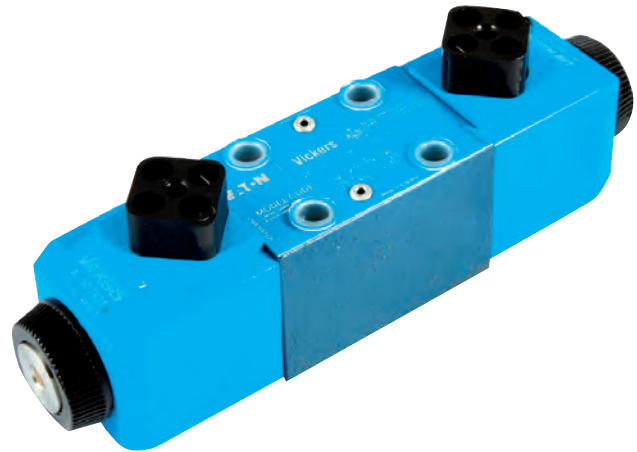

Section 1 – Hydraulics

Hydraulics

Hydraulic QRC

Pneumatic QRC

Ind. Air Prep, Monitor & Test

KELM™ Pneumatics

Pneumatic & Vacuum Equipment

Valves

Ring Main Systems

Adaptors & Fittings

Stainless Steel

Malleable Iron

Hose, Tubing & Couplings

Clamps & Clips


Sprays & Adhesives

Blow Guns & Vacuum

Wash Down & Fuelling


Air Tools

Tools, Hardware & PPE



3 Position, All Ports Open, Spring Centred

0343		Manufacturer's Code	£
859197	110V AC	DG4V 3 0C M U A6 60	122.00




3 Position, All Ports Open, Spring Centred, Water Resistant Override

0343		Manufacturer's Code	£
869960	24V DC	DG4V 3 0C H M U H7 60	177.00
870518	12V DC	DG4V 3 0C H M U G7 60	177.00



P & T Connected, A & B Blocked, Spring Centred

0343		Manufacturer's Code	£
02-144961	110V AC	DG4V 3 8C VM U A6 61	132.50
02-145162	24V DC	DG4V 3 8C VM U H7 61	132.50



P & T Connected, A & B Blocked, Spring Centred, Water Resistant Override

0343		Manufacturer's Code	£
02-353298	110/120V 50/60Hz	DG4V 3 8C H VM U B6 61	191.00



2 Position, Detented

0343		Manufacturer's Code	£
529764	24V DC	DG4V 3 2N M U H7 60	132.50
529765	110V AC	DG4V 3 2N M U A6 60	132.50



2 Position, Detented, Water Resistant Overrides

0343		Manufacturer's Code	£
02-139074	24V DC	DG4V 3 2N H M U H7 60	191.00

Other voltages are available. Please contact Business Development Team for more details.