



Hydraulic Tooling

EAGLE PRO®

Page Tech Sheet 10175

High Pressure Hoses



Application:

- High pressure hydraulic lines, for use with hydraulic tooling, rescue safety equipment, tensioning tools & other hydraulic equipment where high pressure is required.

Construction:

- Inner tube: Thermoplastic Elastomer
- Reinforcement: Single/Double wire braid of aramid fibre with a single wire braid.
- Outer cover: Black polyurethane as standard with a choice of Red, Blue & Yellow available up on request.

Recommended Fluids:

- Hose suitable for Petroleum based hydraulic oil and water glycol based fluids, lubricating oils, grease, solvent, gas transfer, air and water.

Multiple Lines also available upon Request.



We can manufacture hose assemblies in house to suit your requirements.



Working Temperature:
-40°C to +100°C, Not to Exceed
+70°C for Air & Water based fluids



Maximum Working Pressure:
700 bar

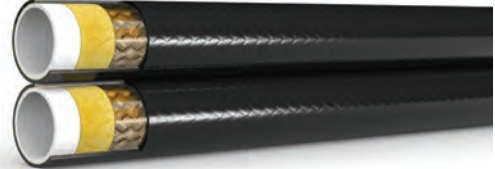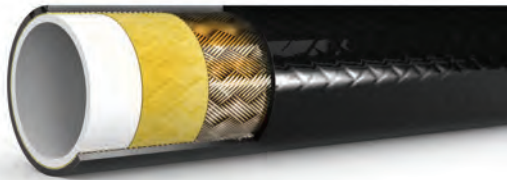

700 bar Jacking Hose, Per Metre

0346	ID	OD mm	bar	mm	bar	£
EH-700-04	1/4"	12.7	700	70	2758	11.10
EH-700-06	3/8"	18.8	700	100	2800	25.35

Twin Line 700 bar Jacking Hose, Per Metre

0346	ID	OD mm	bar	mm	bar	£
EH-700-04-TWIN	1/4"	12.7	700	70	2758	25.65

NPT Male

0346	To Suit Hose I.D.	£
EH-NPTM0404	1/4"	11.70
EH-NPTM0604	3/8"	11.70
EH-NPTM0606	3/8"	11.70



NPT Female

0346	To Suit Hose I.D.	£
EH-NPTF0404	1/4"	11.70
EH-NPTF0606	3/8"	11.70



BSPT Male

0346	To Suit Hose I.D.	£
EH-BMT0404	1/4"	11.70



BSP Female

0346	To Suit Hose I.D.	£
EH-BF0404	1/4"	11.70
EH-BF0606	3/8"	11.70



All hose fittings come complete with ferrule. Swage settings are available on Technical Data Sheet.

Hydraulics

Hydraulic QRC

Pneumatic QRC

Ind. Air Prep, Monitor & Test

KELM™ Pneumatics

Pneumatic & Vacuum Equipment

Valves

Ring Main Systems

Adaptors & Fittings

Stainless Steel

Malleable Iron

Hose, Tubing & Couplings

Clamps & Clips

Sprays & Adhesives

Blow Guns & Vacuum

Wash Down & Fuelling

Air Tools

Tools, Hardware & PPE