



Series 19KA & Accessories



Section 3 – Pneumatic QRC

Y Connector



2 x Coupling Outlets,
1 x Plug Inlet

1910		£
19Y	117	33.00


Free Angle Rotating Joint



Male, BSPT

1910		£
19FAAK13	1/4"	27.50
19FAAK17	3/8"	27.50
19FAAK21	1/2"	34.35

Leader Hoses

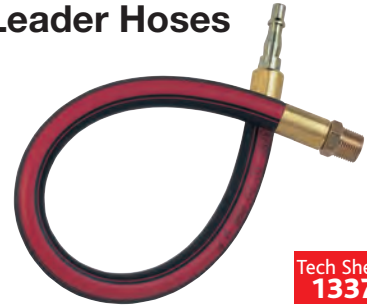

Tech Sheet
1337

3/8" Bore Rubber-Tech Hose,
Plug One End x Male Thread, BSPT

1910			£
LH19/13K	1/4"	381	15.25
LH19/17K	3/8"	381	17.10
LH19/21K	1/2"	381	17.40

A 'Leader Hose' is a length of flexible hose which should be fitted between an air tool & the connecting coupling.
By absorbing the impact of a pneumatic impact tool, a leader hose will significantly increase the life expectancy of the coupling.

WARNING – Leader Hoses

The Health & Safety Executive guide states - "the plug should not be screwed directly into the inlet port, but should be fitted onto a short isolation hose, thus isolating the plug & coupling from the tool vibration".

Triple Outlet Connectors



3 x Coupling Outlets,
1 x 3/8" BSPP Inlet

1910		£
19W	111	75.25



Female, BSPP

1910		£
19FAIW13	1/4"	27.50



3 x Coupling Outlets,
1 x 1/4" BSPP Inlet

1910		£
M3-19		46.30

For Tyre Inflators
see pages
1438-1440

Other materials, seals and finishes available on request, please contact our technical department for further details.