



## Series 21KA

Page Tech Sheet **508**



**Temperature Range:**  
-20°C to +100°C  
Standard Seal NBR



**Maximum Static Working Pressure:**  
PB 35 bar (500 PSI)



Single Shut Off



Actual Size

**Interchangeability:**  
Rectus 90, Camozzi, EWO

**Material:**  
Brass Nickel Plated, Buna Seal (Standard Series Coupling)

**Application:**  
General Purpose Pneumatic Coupling, Medical, Dental, Robotics, Instrumentation

Section 3 – Pneumatic QRC

### Couplings



Male Thread, BSPP

2110				
21KAAW10MPN	1/8"	14	36	9.95
21KAAW13MPN	1/4"	17	38	9.95
21KAAW17MPN	3/8"	19	38	13.75



Female Thread, BSPP

2110				
21KAIW10MPN	1/8"	14	36	10.25
21KAIW13MPN	1/4"	17	38	10.25
21KAIW17MPN	3/8"	19	38	13.75



Hose Tail

2110	To Suit Hose I.D.			
21KATF04MPN	4mm	14	46	13.75
21KATF06MPN	6mm (1/4")	14	46	10.80
21KATF08MPN	8mm (5/16")	14	46	11.50
21KATF09MPN	9mm	14	46	11.40
21KATF10MPN	10mm (3/8")	14	46	11.70



Panel Mount, Standard Hose Tail

2110	To Suit Hose I.D.			
21KATS04MPN	4mm	14	60	21.00
21KATS06MPN	6mm (1/4")	17	60	21.00
21KATS08MPN	8mm (5/16")	17	60	21.00




Quick Fit Tube Connection

2110	To Fit Tube Size mm			
21KAKO06MPN	4 x 6	14	42	11.80
21KAKO08MPN	6 x 8	14	42	11.80




Panel Mount, BSPP

2110				
21KAAS10MPN	1/8"	14	43	13.25
21KAAS13MPN	1/4"	17	43	62.60



Panel Mount, Quick Fit Tube Connection

2110	To Fit Tube Size mm			
21KAKS06MPN	4 x 6	14	54	16.95
21KAKS08MPN	6 x 8	17	54	16.95

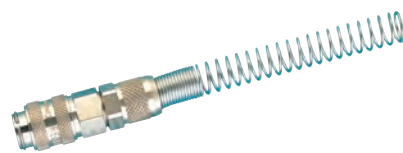

Quick Fit Tube Connection with Spring Guard

2110	To Fit Tube Size mm			
21KAKK06MPN	4 x 6	14	125	15.40
21KAKK08MPN	6 x 8	14	130	15.40

Other materials, seals and finishes available on request, please contact our technical department for further details.