



## Series 21KA




**Temperature Range:**  
-20°C to +100°C  
Standard Seal NBR



**Maximum Static Working Pressure:**  
PB 35 bar (500 PSI)

### Plugs




Male Thread, BSPP

2110				
21SFAW10MXN	1/8"	14	25	2.70
21SFAW13MXN	1/4"	17	28	2.80
21SFAW17MXN	3/8"	17	28	3.50



Quick Fit Tube Connection

2110			
21SFKO06MXN	4 x 6	32	3.10
21SFKO08MXN	6 x 8	32	3.20

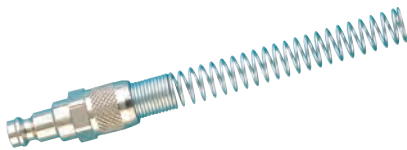

Quick Fit Tube Connection with Spring Guard

2110			
21SFKK06MXN	4 x 6	115	5.40
21SFKK08MXN	6 x 8	120	5.40




Panel Mount, Standard Hose Tail

2110				
21SFTS04MXN	4mm	14	50	8.70
21SFTS05MXN	5mm	14	50	8.70
21SFTS06MXN	6mm (1/4")	14	50	8.70
21SFTS09MXN	9mm	14	50	8.70



Panel Mount, Quick Fit Tube Connection

2110				
21SFKS06MXN	4 x 6	14	44	8.85
21SFKS08MXN	6 x 8	17	44	8.85



Hose Tail


2110			
21SFTF04MXN	4mm	32	6.20
21SFTF05MXN	5mm	32	2.25
21SFTF06MXN	6mm (1/4")	32	2.25
21SFTF08MXN	8mm (5/16")	32	2.40
21SFTF09MXN	9mm	33	2.40
21SFTF10MXN	10mm (3/8")	33	2.30



Female Thread, BSPP

2110				
21SFIW10MXN	1/8"	14	25	2.80
21SFIW13MXN	1/4"	17	25	2.80
21SFIW17MXN	3/8"	19	26	4.00

## For Brass Quick-Fit Push-on Fittings see pages 565-567

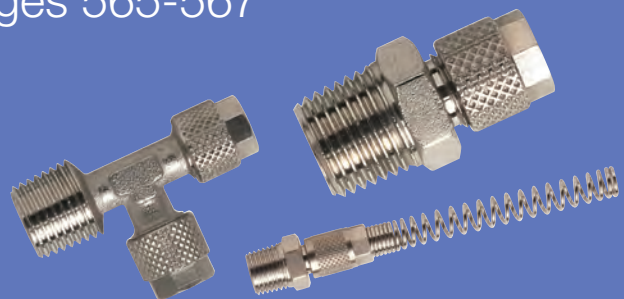

Other materials, seals and finishes available on request, please contact our technical department for further details.

Hydraulics

Hydraulic QRC

Pneumatic QRC

Ind. Air Prep, Monitor & Test

KELM™ Pneumatics

Pneumatic & Vacuum Equipment

Valves

Ring Main Systems

Adaptors & Fittings

Stainless Steel

Malleable Iron

Hose, Tubing & Couplings

Clamps & Clips

Sprays & Adhesives

Blow Guns & Vacuum

Wash Down & Fuelling

Air Tools

Tools, Hardware & PPE