



## Series 26KB



Page Tech Sheet **520**



**Temperature Range:**  
-20°C to +100°C  
Standard Seal NBR




**Maximum Static Working Pressure:**  
PB 35 bar (500 PSI)



Double Shut Off

**Interchangeability:**  
Rectus Design

**Material:**  
Brass  
**Application:**  
General Purpose Pneumatic Coupling

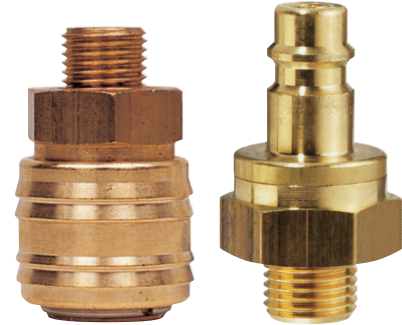

Actual Size

### Couplings



Male Thread, BSPP

2610



26KBAW13MPX	1/4"	22	39	21.05
26KBAW17MPX	3/8"	22	41	21.05
26KBAW21MPX	1/2"	24	42	21.05



Female Thread, BSPP

2610



26KBIW13MPX	1/4"	22	41	39.60
26KBIW17MPX	3/8"	22	41	21.05
26KBIW21MPX	1/2"	24	44	21.05



Hose Tail

2610



26KBTf06MPX	6mm (1/4")	21	58	24.90
26KBTf08MPX	8mm (5/16")	21	58	24.90
26KBTf10MPX	10mm (3/8")	21	58	24.90
26KBTf13MPX	13mm (1/2")	21	58	24.90

### Plugs



Male Thread, BSPP

2510



25SBAW13MPX	1/4"	22	43	16.40
25SBAW17MPX	3/8"	22	43	17.05
25SBAW21MPX	1/2"	22	46	17.25



Female Thread, BSPP

2510



25SBIW13MPX	1/4"	22	43	16.40
25SBIW17MPX	3/8"	22	43	17.05
25SBIW21MPX	1/2"	22	46	17.25




Hose Tail

2510



25SBTF06MPX	6mm (1/4")	21	60	20.70
25SBTF08MPX	8mm (5/16")	21	60	28.90
25SBTF10MPX	10mm (3/8")	21	60	20.90
25SBTF13MPX	13mm (1/2")	21	60	21.15

For Brass & Brass Nickel  
Plated Hose Tails  
see pages 817-819

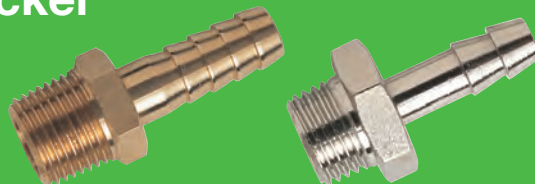

Other materials, seals and finishes available on request, please contact our technical department for further details.

Hydraulics

Hydraulic QRC

Pneumatic QRC

Ind. Air Prep, Monitor & Test

KELM™ Pneumatics

Pneumatic & Vacuum Equipment

Valves

Ring Main Systems

Adaptors & Fittings

Stainless Steel

Malleable Iron

Hose, Tubing & Couplings

Clamps & Clips

Sprays & Adhesives

Blow Guns & Vacuum

Wash Down & Fuelling

Air Tools

Tools, Hardware & PPE