



# Air Line Couplings



Page Tech Sheet **10666**

## MF Couplings

**Nominal Bore:** 5.0mm  
**Flow Rate @ 6 bar**  
(0.5 bar P.D.) : 1800 l/min

**Interchangeability:**

Cejn 310/312  
Rectus 23/25/26  
Hanson 3000  
Dynaquip DC 3

**Working Temperature:**  
-20°C to +100°C

**Maximum Working Pressure:**  
35 bar (508 psi)

Section 3 – Pneumatic QRC

Hydraulics
Hydraulic QRC
Pneumatic QRC
Ind. Air Prep., Monitor & Test
KELM™ Pneumatics
Pneumatic & Vacuum Equipment
Valves
Ring Main Systems
Adaptors & Fittings
Stainless Steel
Malleable Iron
Hose, Tubing & Couplings
Clamps & Clips
Sprays & Adhesives
Blow Guns & Vacuum
Wash Down & Fuelling
Air Tools
Tools, Hardware & PPE



Male Thread, BSPT

7000		£
AC73CM	1/4"	21.15
AC73EM	3/8"	21.15
AC73JM	1/2"	21.15




Female Thread, BSPP

7000		£
AC73CF	1/4"	21.15
AC73EF	3/8"	21.15
AC73JF	1/2"	21.15



Hose Tail

7000	To Suit Hose I.D.	£
AC7306	6mm (1/4")	21.15
AC7308	8mm (5/16")	21.15
AC7310	10mm (3/8")	21.15
AC7313	13mm (1/2")	21.15

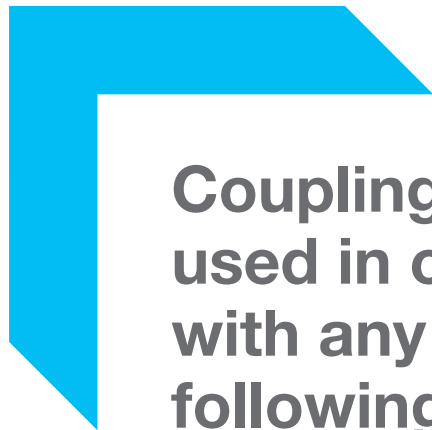

Coupling can be used in conjunction with any of the following plugs  
**ISO B12, XF, & Euro**

