



Pilot Valves



Operational Temperature:
-20°C to +70°C

Working Pressure:
1.5 to 8 bar

Medium: Clean Compressed Air.
Filtered (40µm) & Lubricated
Material: Body: Aluminium Alloy **Seals:** NBR

Pilot 5/3 Way Valves




Pilot/Pilot, Fully Sealed Mid Position, BSPP

0335



DKA230C-06	1/8"	102.10
DKA230C-08	1/4"	113.50
DKA330C-10	3/8"	132.95
DKA430C-15	1/2"	215.10

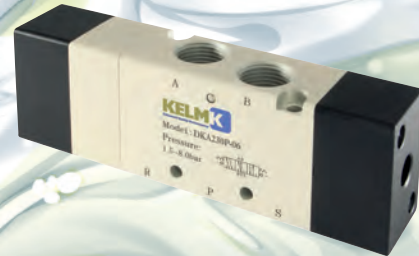


Pilot/Pilot, Centre Open Pressurised, BSPP

0335



DKA230P-06	1/8"	102.10
DKA230P-08	1/4"	113.50
DKA330P-10	3/8"	132.95
DKA430P-15	1/2"	215.10



Pilot/Pilot, Supply Sealed Mid Position, BSPP

0335



DKA230E-06	1/8"	102.10
DKA230E-08	1/4"	113.50
DKA330E-10	3/8"	132.95
DKA430E-15	1/2"	215.10

Hydraulics

Hydraulic QRC

Pneumatic QRC

Ind. Air Prep., Monitor & Test

KELM™ Pneumatics

Pneumatic & Vacuum Equipment

Valves

Ring Main Systems

Adaptors & Fittings

Stainless Steel

Malleable Iron

Hose, Tubing & Couplings

Clamps & Clips

Sprays & Adhesives

Blow Guns & Vacuum

Wash Down & Fuelling

Air Tools

Tools, Hardware & PPE