




# Aluminium Hose Tails



## Male x Hose Tails

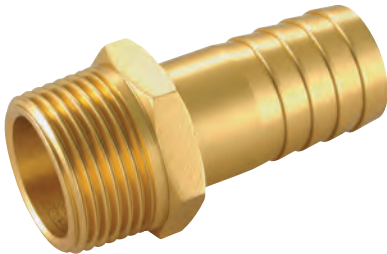

**Technical Information:**  
A new concept in design, these lightweight hose tails are manufactured to the high specification.

**Threads:**  
Tapered in conformity with ISO 7.1, BS 21, DIN 2999.

**Media:**  
Compressed air, water, oils & fluids in general for the pneumatic fields

**Temperature Range:**  
0°C to +80°C

**Pressure:**  
10 bar

Male, BSPT

0383		To Suit Hose I.D.	£
AGT13/06K	1/4"	1/4"	1.70
AGT13/08K	1/4"	5/16"	1.70
AGT13/09K	1/4"	3/8"	1.70
AGT13/13K	1/4"	1/2"	1.90
AGT17/09K	3/8"	3/8"	1.95
AGT17/13K	3/8"	1/2"	2.60
AGT21/13K	1/2"	1/2"	3.50
AGT21/19K	1/2"	3/4"	4.25
AGT26/19K	3/4"	3/4"	5.45
AGT33/25K	1"	1"	9.00

- A new concept in design, these lightweight hose tails are manufactured to a high strength specification with a lower cost in comparison to its brass alternative.
- Tapered in conformity with ISO 7.1, BS 21, DIN 2999.
- Has the appearance of brass.
- Lightweight.
- Compressed air, water, oils & fluids in general for the pneumatic fields.

N.B. Safe pressures and temperatures depend entirely on the hose being used, for this reason the values must be determined in accordance with the hose features.



Hydraulics

Hydraulic QRC

Pneumatic QRC

Ind. Air Prep., Monitor & Test

KELM™ Pneumatics

Pneumatic & Vacuum Equipment

Valves

Ring Main Systems

Adaptors & Fittings

Stainless Steel

Malleable Iron

Hose, Tubing & Couplings

Clamps & Clips

Sprays & Adhesives

Blow Guns & Vacuum

Wash Down & Fuelling

Air Tools

Tools, Hardware & PPE