



Hydraulic Hose

GH663 1SN

- EN853.
- SAE 100R1AT.
- DIN 20022/3 - 1SN

Temperature:
-40°C to +100°C
Maximum Temp = 125°C
Air* max temp = +70°C

Application:
Hydraulic systems with petroleum and water-glycol base fluids, for fuel and lubricating oils, air* and water.
For use with Global TTC fittings.

*Rubber covered hose styles for use with gases above 17.5 bar (250 psi) must be perforated.

Construction:
Synthetic NBR rubber tube, 1-wire braid reinforcement, Synth. CR rubber cover.



Per Metre

0235	ID	OD mm	bar	£
GH663-4	1/4"	13.4	225	6.40
GH663-5	5/16"	15	225	7.00
GH663-6	3/8"	17.4	210	7.00
GH663-8	1/2"	20.6	175	8.40
GH663-10	5/8"	23.7	140	10.00
GH663-12	3/4"	27.7	125	11.20
GH663-16	1"	35.6	90	15.30
GH663-20	1.1/4"	43.5	65	21.30
GH663-24	1.1/2"	50.6	50	35.80
GH663-32	2"	64	40	45.40

GH793 2SN


- EN853.
- SAE 100R2AT.
- DIN 20022/3 - 2SN

Temperature:
-40°C to +100°C
Maximum Temp = 125°C
Air* max temp = +70°C

Application:
High pressure hydraulic systems with petroleum and water-glycol base fluids, for fuel and lubricating oils, air* and water.

For use with Global TTC fittings.
*Rubber covered hose styles for use with gases above 17.5 bar (250 psi) must be perforated.

Construction:
Synth. NBR rubber tube, 2-wire braid reinforcement, synth. CR rubber cover.

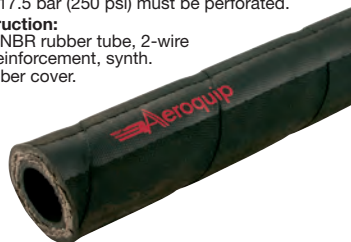

Per Metre

0235	ID	OD mm	bar	£
GH793-4	1/4"	15	400	7.70
GH793-6	3/8"	19	345	9.00
GH793-8	1/2"	22.2	295	10.10
GH793-10	5/8"	25.4	250	12.35
GH793-12	3/4"	29.3	215	14.00
GH793-16	1"	38.1	175	21.30
GH793-20	1.1/4"	48.3	155	41.10
GH793-24	1.1/2"	54.6	125	49.10
GH793-32	2"	67.3	90	57.15

GH781 2SC


- EN853.
- SAE100R2AT.
- DIN 20022/3 - 2SN.
- 1/2 SAE Bend Radius.

Temperature:
-40°C to +100°C
Maximum Temp = 125°C
Air* max temp = +70°C

Application:
High pressure hydraulic systems with petroleum and water-glycol base fluids, for fuel and lubricating oils, air* and water.

For use with Global TTC fittings.
*Rubber covered hose styles for use with gases above 17.5 bar (250 psi) must be perforated.

Construction:
Synth. NBR rubber tube, 2-wire braid reinforcement, synth. CR rubber cover.



Per Metre

0235	ID	OD mm	bar	£
GH781-4	1/4"	15.5	400	7.90
GH781-5	5/16"	15	350	9.05
GH781-6	3/8"	17.4	345	8.70
GH781-8	1/2"	20.5	295	9.70
GH781-10	5/8"	23.7	250	10.95
GH781-12	3/4"	27.4	215	12.65
GH781-16	1"	35.6	175	19.05
GH781-20	1.1/4"	43.3	155	30.40
GH781-24	1.1/2"	51.6	125	91.25

2755B

- EN856.

Temperature:
-40°C to +100°C
Maximum Temp = 120°C

Application:
High pressure hydraulic systems with petroleum.
For use with Spiral Skive fittings.

Construction:
Synth. NBR rubber tube, 4-spiral wire reinforcement, synth. Rubber EPDM and polyurethane cover.



Per Metre

0235	ID	OD mm	bar	£
2755B-6	3/8"	21.4	490	27.20
2755B-8	1/2"	24.6	420	29.55
2755B-10	5/8"	28.2	400	33.30
2755B-12	3/4"	32.2	380	39.75
2755B-16	1"	39.7	320	47.20

AEROQUIP MatchMate Plus GH663 1SN

AEROQUIP MatchMate Plus GH793 2SN

AEROQUIP MatchMate Plus GH781 2SC

AEROQUIP 2755B

AEROQUIP MatchMate Blue GH194 AQP Hose

AEROQUIP MatchMate Blue GH195 AQP Hose

GH194 AQP

- EN853 Type 1SN.
- SAE100R1AT.

Temperature:
-40°C to +150°C

Application:
Hydraulic system service with petroleum, fire-resistant and water-base fluids, fuel and lubricating systems.

For use with Global TTC fittings.

Construction:
AQP elastomer tube, reinforcement single wire braid, blue AQP cover with silver layline.



Per Metre

0235	ID	OD mm	bar	£
GH194-6	3/8"	17.5	210	29.35
GH194-8	1/2"	20.7	175	36.05
GH194-10	5/8"	23.8	140	37.95
GH194-12	3/4"	27.8	125	44.85
GH194-16	1"	35.8	90	64.70
GH194-20	1.1/4"	44	60	97.70

GH195 AQP

- EN853 Type 2SN.
- SAE100R2AT.

Temperature:
-40°C to +150°C

Application:
Hydraulic system service with petroleum, fire-resistant and water-base fluids, fuel and lubricating systems.

For use with Global TTC fittings.

Construction:
AQP elastomer tube, reinforcement double wire braid, blue AQP cover.



Per Metre

0235	ID	OD mm	bar	£
GH195-4	1/4"	15.1	400	34.20
GH195-6	3/8"	19.2	345	41.30
GH195-8	1/2"	22.1	290	41.75
GH195-10	5/8"	25.1	225	47.70
GH195-12	3/4"	29.5	210	57.10
GH195-16	1"	37.8	170	83.75
GH195-20	1.1/4"	48.8	155	150.70
GH195-24	1.1/2"	55.1	120	159.85
GH195-32	2"	67.8	100	134.60