



Excel 32 V03, V04 & V05 Series

Page Tech Sheet 10363

- Extensive Range of Power & Orifice Size Options
- G1/8, G1/4 & 7mm Interface
- Compact Installation
- Removable Coil
- Standard Exhaust Diffuser
- Choice of Manual Override

Ambient Temperature:
-20°C to +50°C

Medium:
Compressed Air, Filtered, Lubricated & Non Lubricated
Materials:
Coil: Glass Reinforced Nylon
Armature: Stainless Steel

Base:
Zinc Alloy (G1/8), Brass (G1/4), Polyester (interface)
Seals: Nitrile (viton top seat)

V03 Series


V03 2/2 NC 24V DC 0-10 bar
1mm Orifice

V03A286J-B613A	G1/8	81.00

V03 3/2 NC 24V DC 0-10 bar
1mm Orifice

V03X486J-B613A	Interface	92.00
V03A486J-B613A	G1/8	92.00

Note: the above valves are only available in 24V DC.

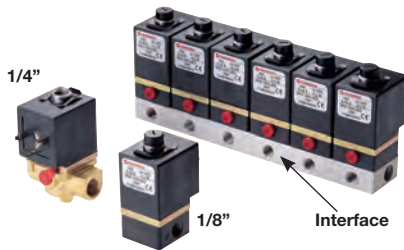

V04 Series

V04 2/2 SOL NC 0-10 bar
2.5mm Orifice

V04X286M-B623A	Interface	24V DC	80.90
V04X286M-B628A	Interface	110/50-60	83.20
V04A286M-B623A	G1/8	24V DC	76.35
V04A286M-B628A	G1/8	110/50-60	76.35
V04A286M-B629A	G1/8	220/50-60	83.20
V04B286M-B423A	G1/4	24V DC	93.10
V04B286M-B428A	G1/4	220/50-60	97.65
V04B286M-B429A	G1/4	220/50-60	106.50

V04 3/2 SOL NC 0-10 bar
2mm Orifice

V04X486L-B623A	Interface	24V DC	72.75
V04X486L-B628A	Interface	110/50-60	72.75
V04X486L-B629A	Interface	220/50-60	72.75
V04A486L-B623A	G1/8	24V DC	72.75
V04A486L-B628A	G1/8	110/50-60	72.75
V04A486L-B629A	G1/8	220/50-60	72.75

V04 3/2 SOL NO 0-10 bar
2mm Orifice

V04X386L-B623A	Interface	24V DC	83.20
V04X386L-B628A	Interface	110/50-60	83.20
V04X386L-B629A	Interface	220/50-60	83.20
V04A386L-B623A	G1/8	24V DC	76.35
V04A386L-B628A	G1/8	110/50-60	76.35
V04A386L-B629A	G1/8	220/50-60	76.35

V05 Series

V05 2/2 SOL NC 0-16 bar
2.5mm Orifice

V05X286M-B633A	Interface	24V DC	83.20
V05X286M-B638A	Interface	110/50-60	83.20
V05A286M-B633A	G1/8	24V DC	80.90
V05A286M-B638A	G1/8	110/50-60	93.70
V05B286M-B433A	G1/4	24V DC	102.15
V05B286M-B438A	G1/4	110/50-60	102.15

V05 3/2 SOL NC 0-10 bar
2.5mm Orifice

V05X486M-B633A	Interface	24V DC	76.35
V05X486M-B638A	Interface	110/50-60	83.20
V05X486M-B639A	Interface	220/50-60	83.20
V05A486M-B633A	G1/8	24V DC	72.75
V05A486M-B638A	G1/8	110/50-60	76.35
V05A486M-B639A	G1/8	220/50-60	72.75

V05 3/2 SOL NC 0-10 bar
2.5mm Orifice

V05X386M-B633A	Interface	24V DC	76.35
V05X386M-B639A	Interface	220/50-60	75.90
V05A386M-B633A	G1/8	24V DC	76.35
V05A386M-B638A	G1/8	110/50-60	76.35
V05A386M-B639A	G1/8	220/50-60	80.90

Accessories for Excel 32

Manifolds to suit Interface Valves G1/8

M/P35598/1	1	59.40
M/P35598/2	2	114.45
M/P35598/3	3	170.40
M/P35598/4	4	225.80
M/P35598/5	5	306.35
M/P35598/6	6	336.80
M/P35598/8	8	605.80
M/P35598/9	9	659.40
M/P35598/10	10	719.10

V03, V04 & V05 Spare Solenoid Coils

V03X286A-Q1213	V03	24V DC	31.40
V04X286A-Q1228	V04	110/50-60	30.35
V04X286A-Q1229	V04	220/50-60	30.35
V05X286A-Q1233	V05	24V DC	42.35
V05X286A-Q1238	V05	110/50-60	42.35
V05X286A-Q1239	V05	220/50-60	42.35