



Ball Valves

Degreased Ball Valves, Brass

High quality 2 piece full bore ball valve with full thread, degreased for oxygen. Valves supplied individually bagged and heat sealed.

- Body: Nickel Plated Brass/Handle Aluminium
- Ball: Chromed Brass
- Seals: PTFE
- Stem Seal: NBR

Temperature Range:
-20°C to +80°C

Tech Sheet
2119



Female x Female, BSPT

0158		£
5940-14	1/4"	9.40
5940-38	3/8"	9.40
5940-12	1/2"	11.50
5940-34	3/4"	16.65
5940-1	1"	25.15
5940-114	1.1/4"	45.20
5940-112	1.1/2"	66.65
5940-2	2"	86.75
5940-212	2.1/2"	207.00
5940-3	3"	294.25
5940-4	4"	494.95


Light Model Brass Ball Valve, Red Handle

Lightweight, low pressure brass ball valve.

Suitable for domestic water services, heating, air-conditioning, & compressed air systems.

Available upto 4" on Request.

Tech Sheet
10157

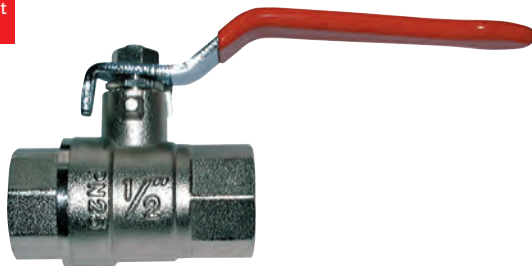

Female x Female, BSPP

0109		£
LMBV-12	1/2"	7.70
LMBV-34	3/4"	11.10
LMBV-1	1"	17.25
LMBV-114	1.1/4"	27.75
LMBV-112	1.1/2"	42.20
LMBV-2	2"	64.70

Full Flow Ball Valves, Brass

Temperature Range:
-15°C to +150°C

Tech Sheet
10023



Type BV90, Female x Female, Lever Handle, BSPP

0090		£
BV90-14	1/4"	7.90
BV90-38	3/8"	7.90
BV90-12	1/2"	8.55
BV90-34	3/4"	13.25
BV90-1	1"	20.00
BV90-114	1.1/4"	33.15
BV90-112	1.1/2"	49.35
BV90-2	2"	77.55

ISO 5211 Pad, WRAS Approved

Full Bore ISO 5211 Direct Mount

Working Temperature:
-20°C to +95°C

Maximum Working Pressure:
40 bar

Tech Sheet
10291



Female x Female, BSPP

0090		£
LV4500-12	1/2"	39.25
LV4500-34	3/4"	50.55
LV4500-1	1"	67.40
LV4500-114	1.1/4"	112.70
LV4500-112	1.1/2"	151.65
LV4500-2	2"	224.70
LV4500-212	2.1/2"	872.90

Hydraulics

Hydraulic QRC

Pneumatic QRC

Ind. Air Prep., Monitor & Test

KELM™ Pneumatics

Pneumatic & Vacuum Equipment

Valves

Ring Main Systems

Adaptors & Fittings

Stainless Steel

Malleable Iron

Hose, Tubing & Couplings

Clamps & Clips

Sprays & Adhesives

Blow Guns & Vacuum

Wash Down & Fuelling

Air Tools

Tools, Hardware & PPE