



Solenoid Valves



Page Tech Sheet **10109**

Technical:

- Corrosion resistant construction with standard manual override.
- Direct mounting conforms to NAMUR VDI/VDE 3845 standard.
- 5/2 and 3/2 function selectable via 180° rotation of single adaptor plate.

NAMUR Solenoid Valves VII




Standard, 1/4" BSPP

0332		£
VSK-NCE0-AC110	110V AC	54.10
VSK-NCE0-AC220	220V AC	54.10
VSK-NCE0-DC024	24V DC	54.10
VSK-NCE0-AC024	24V AC	54.10



Explosion Proof, 1/4" BSPP

0332		£
VEK-NCN0-AC120	120V AC	186.70
VEK-NCN0-AC230	230V AC	186.70
VEK-NCN0-DC024	24V DC	186.70

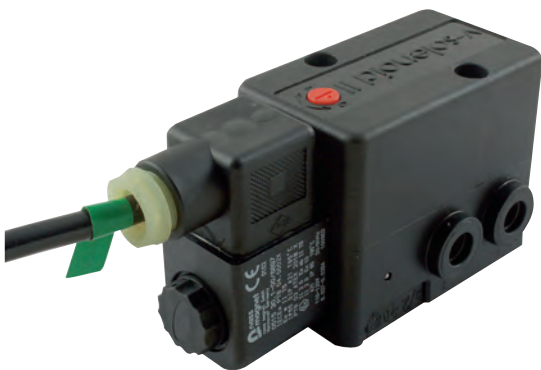

ATEX Ex, 1/4" BSPP

0332		£
VAK-NCN0-AC120	120V AC	186.70
VAK-NCN0-AC230	230V AC	186.70
VAK-NCN0-DC024	24V DC	186.70



Intrinsically Safe, 1/4: BSPP

0332		£
VIK-NSN0-DC024	24V DC	197.35

- Hydraulics
- Hydraulic QRC
- Pneumatic QRC
- Ind. Air Prep., Monitor & Test
- KELM™ Pneumatics
- Pneumatic & Vacuum Equipment
- Valves**

- Ring Main Systems
- Adaptors & Fittings
- Stainless Steel
- Malleable Iron
- Hose, Tubing & Couplings
- Clamps & Clips
- Sprays & Adhesives
- Blow Guns & Vacuum
- Wash Down & Fuelling
- Air Tools
- Tools, Hardware & PPE