



## Aluminium Ring Main System

Page Tech Sheet **10164**

**Working Temperature:**  
-20°C to +70°C

**Maximum Working Pressure:**  
13 bar

**N.B:** Fittings 67, 84, 100, 150 & 200 will require 'Lugged Tube'

### Quick Connect Ball Valves



Tube x Tube, Brass

0368	OD mm	Type	£
2009 1051 00	20	A	24.85
2009 2051 00	25	A	34.15



Tube x Tube, Brass Nickel Plated


0368	OD mm	Type	£
2014 4051 00	40	A	61.45
2014 5051 00	50	A	93.80



Tube x Female BSPP, Brass


0368	OD mm	Type	£
2009 1251 00	20	A	24.85
2009 1151 00	20	A	24.85
2009 2251 00	25	A	31.10

### Quick Connect Butterfly Valves

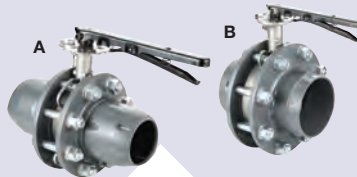

Tube x Tube, Carbon Steel

0368	OD mm	Type	£
2009 6051 00	63	A	146.00
2014 6051 00	67	B	97.05
2009 7051 00	80	A	164.35
2014 7051 00	84	B	113.25
2009 8051 00	100	B	140.15
2009 9051 00	150	B	243.00
2009 A051 00	200	B	308.15

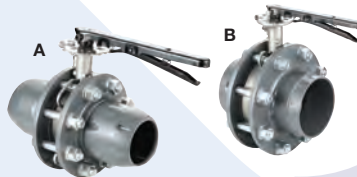

Tube x Tube, Stainless Steel

0368	OD mm	Type	£
2009 6151 00	63	A	264.10
2014 6151 00	67	B	161.75
2009 7151 00	80	A	306.95
2014 7151 00	84	B	177.95
2009 8151 00	100	B	354.20
2009 9151 00	150	B	615.20
2009 A151 00	200	B	770.40

**Type A = Push-in Type**  
**Type B = Lugged Type**

Sizes 100, 150 & 200mm will not be available from stock in the UK. Standard delivery on these lines will be 4-6 weeks.

### Brass Ball Valves




Female, BSPP

0368	£
2009 0073 00	6.20
2009 0173 00	8.70
2009 2073 00	15.55
2009 0973 00	31.10



Male/Female, BSPT/BSPP

0368	£
2009 0273 00	8.70
2009 1273 00	8.70



Male, BSPT

0368	£
2009 1073 00	6.20
2009 1173 00	8.70

### Automatic Drain Valves

Ball valve will be required.



Female, BSPP

0368	£
2009 0973 00	31.10