




Industrial Blowguns

Technical Characteristics


Compatible Fluids	Compressed air
Working Pressure	0 to 10 bar
Working Temperature	-15°C to +50°C
Component Materials	Technical polymer, NBR



0659 Standard, Lower Connection, Female BSPP




C		
G1/4	3.5	0659 00 13


0654 Safety, Lower Connection, Female BSPP Thread



C		
G1/4	3	0654 00 13

0652 Progressive Control, Lower Connection, Female BSPP



C	C1	
G1/4	M12x1.25	0652 66 13

With interchangeable nozzle

Regulations

Compliance for all blowguns:

DI: 97/23/EC (PED)
 DI: 2002/95/EC (RoHS),
 2011/65/EC
 DI: 1907/2006 (REACH)

Protection of design


All designs and models of Parker Legris blowguns have been registered with the following numbers:
 13224 / 13225 / 13226.


Compliance for specific blowguns:

DI: 1910.242 (b) [OSHA]
 The static pressure must be less than 30 psi in case the nozzle becomes blocked.
 DI: 1910.95 (b) [OSHA]
 The noise level must be less than 90 dBA over 8 hours' exposure.
 DI: 2003/10/EC
 Regulation relating to exposure to noise, particularly with regard to risks to hearing. The noise level must be less than 87 dBA.



0653 Energy Saving, Lower Connection, Female BSPP Thread




C	C1	
G1/4	M12x1.25	0653 66 13


0623 Lever-Operated, Female BSPP Thread




C		
G1/4	2	0623 10 35


0631..09 Blowgun Kit, Lower Connection, Male BSPT Thread




C	
R1/4	0631 00 09

0631..23 Blowgun Kit, Energy Saving, Male BSPT Thread



C	
R1/4	0631 00 23

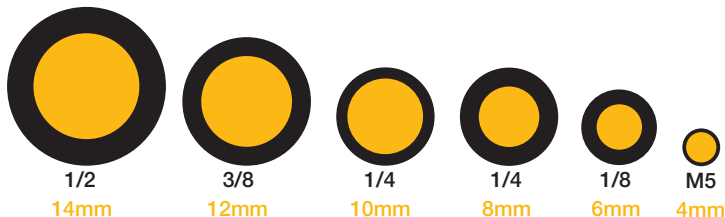

Threads / O.D. of tube