






# Polymer Blowguns

## 0659 Standard Blowgun, Lower Connection with Short Angled Nozzle, Female BSPP Thread

	Technical polymer, nickel-plated brass, treated aluminium, NBR 	<b>C</b>  	<b>F</b> <b>H</b> <b>L</b> <b>kg</b>
		G1/4 3.5 <b>0659 00 13</b>	20 120 223 0.072

Nozzle: aluminium, NPT version available.





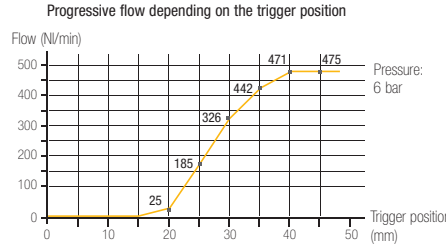Progressive flow depending on the trigger position



Pressure: 6 bar


- 475 Nl/min
- 82 dBA
- OSHA 1910.242 (b)
- OSHA 1910.95 (b)
- 2003/10/EC directive: Requirement to use ear protection if exposure > 8 hours

## 0654 Safety Blowgun, Lower Connection, Female BSPP Thread

	Technical polymer, nickel-plated brass, NBR 	<b>C</b>  	<b>F</b> <b>H</b> <b>H1</b> <b>L</b> <b>L1</b> <b>kg</b>
		G1/4 3 <b>0654 00 13</b>	20 117 35 148 73 0.189

Nozzle: nickel-plated brass, NPT version available.




Progressive flow depending on the trigger position

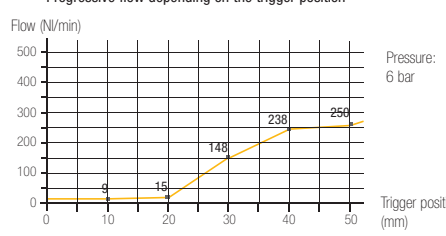

Pressure: 6 bar


- 250 Nl/min
- 80 dBA
- OSHA 1910.242 (b)
- OSHA 1910.95 (b)
- 2003/10/EC directive: No ear defenders necessary

## 0653 Energy-Saving Blowgun, Lower Connection with Interchangeable Nozzle, Female BSPP Thread

	Technical polymer, nickel-plated brass, NBR 	<b>C</b> <b>C1</b> 	<b>F</b> <b>H</b> <b>H1</b> <b>L</b> <b>kg</b>
		G1/4 M12x1.25 <b>0653 66 13</b>	20 117 34 147 0.144

Flow characteristics depend on the type of nozzle used. Delivered without nozzle. A value calculator for energy savings is available.

Progressive flow depending on the trigger position

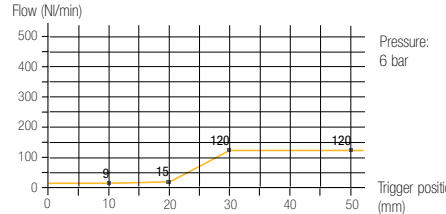

Pressure: 6 bar

- 120 Nl/min
- 80 dBA (Noise level measured without nozzle)
- OSHA 1910.242 (b): Depends on type of nozzle
- OSHA 1910.95 (b)
- 2003/10/EC directive: No ear defenders necessary

 Maximum Flow Rate (tolerance +/-10%)	 Noise Level ISO 15744	 Diffusion Cone	 Compliance with Standards
--	---	--	---

### Operation: Safety Blowgun



Flow stopped completely and pressure reduced to 0.5 bar

### Operation: Blowgun with Safety Nozzle



Flow diverted and pressure reduced to 0.5 bar

