


Universal Series, Vented

0462 3/2 Right-Angled Ball Valve with Vent, Female BSPP Thread



Nickel-plated brass, NBR




| C | DN | | E | F | H | H1 | H2 | J | L | L1 | M | kg |
|------|----|------------|------|----|----|----|----|----|----|----|-----|-------|
| G1/8 | 6 | 0462 06 10 | 8 | 19 | 38 | 31 | 20 | 22 | 37 | 27 | 48 | 0.192 |
| G1/4 | 6 | 0462 06 13 | 12 | 19 | 38 | 31 | 24 | 22 | 38 | 28 | 48 | 0.185 |
| G3/8 | 9 | 0462 09 17 | 12 | 24 | 45 | 43 | 27 | 25 | 46 | 31 | 69 | 0.261 |
| G1/2 | 12 | 0462 12 21 | 15 | 27 | 47 | 44 | 33 | 29 | 49 | 34 | 69 | 0.312 |
| G3/4 | 18 | 0462 18 27 | 16.5 | 38 | 59 | 51 | 40 | 39 | 60 | 39 | 108 | 0.698 |
| G1 | 23 | 0462 23 34 | 19 | 46 | 63 | 55 | 47 | 48 | 72 | 47 | 108 | 1.066 |

Maximum working pressure: 20 bar

0461 3/2 Right-Angled Ball Valve with Vent, Male/Female BSPP Thread



Nickel-plated brass, NBR




| C | DN | | E | E1 | F | H | H1 | H2 | J | L | L1 | M | kg |
|------|----|------------|------|----|----|----|----|----|----|----|----|-----|-------|
| G1/8 | 6 | 0461 06 10 | 8 | 7 | 19 | 38 | 31 | 20 | 22 | 37 | 27 | 48 | 0.182 |
| G1/4 | 6 | 0461 06 13 | 12 | 9 | 19 | 38 | 31 | 24 | 22 | 38 | 28 | 48 | 0.186 |
| G3/8 | 9 | 0461 09 17 | 12 | 11 | 24 | 45 | 43 | 27 | 25 | 46 | 31 | 69 | 0.257 |
| G1/2 | 12 | 0461 12 21 | 15 | 12 | 27 | 47 | 44 | 33 | 29 | 49 | 34 | 69 | 0.304 |
| G3/4 | 18 | 0461 18 27 | 16.5 | 12 | 38 | 59 | 51 | 40 | 39 | 60 | 39 | 108 | 0.648 |

Maximum working pressure: 20 bar

Operation of Right-Angled Vented Ball Valves

Operation of Lockable Vented Ball Valves


With pin-hole vent = purge to atmosphere without silencer

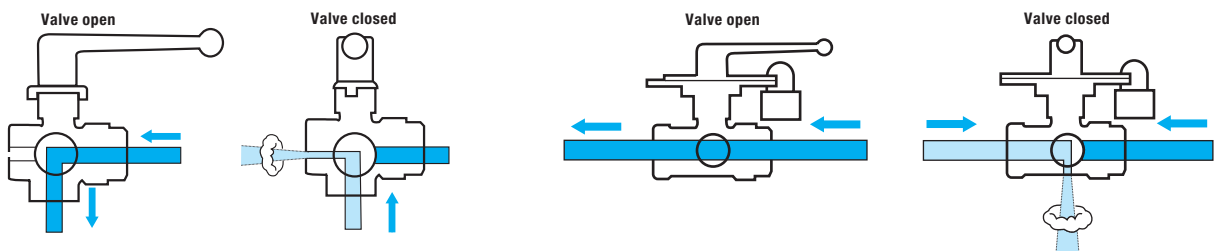

Removable lever: where the lever is obstructed in its movement, it can be refitted the opposite way.

Operation of 3/2 Lockable Valves

Drilled below and square in the horizontal plane, these valves provide a connection between: either port 1 and port 2, or port 2 and port 3.

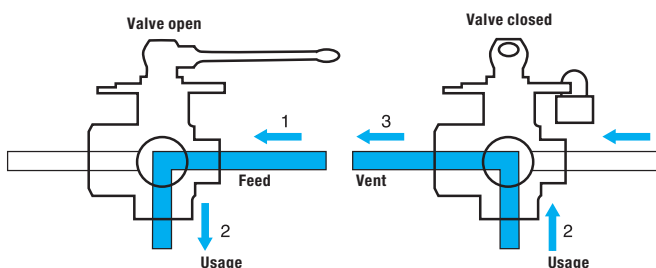

Removable lever: where the lever is obstructed in its movement, it can be refitted the opposite way.