



# Polymer Blowguns

## 0658 Progressive Control Blowgun, Upper Connection with Standard Nozzle, Female BSPP Thread




Technical polymer, nickel-plated brass, NBR



C	DN	F	H	H1	L	L1	kg	
G1/4	2.5	0658 66 13	20	117	37	145	10	0.195

Nozzle: nickel-plated brass

Progressive flow depending on the trigger position

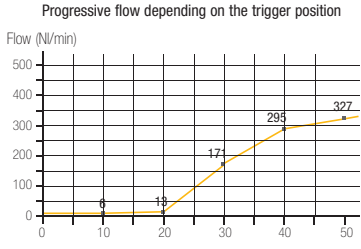


Flow (Nl/min)

Pressure: 6 bar


Trigger position (mm)

- 327 Nl/min Flow produced with nozzle 0690 01 00
- 86 dBA
- OSHA 1910.95 (b)  
2003/10/EC directive:  
Requirement to use ear protection if exposure > 8 hours

## 0656 Safety Progressive Control Blowgun, Lower Connection with Short Angled Nozzle, Female BSPP




Technical polymer, nickel-plated brass, NBR



C	DN	F	H	H1	L	L1	kg	
G1/4	2.5	0656 66 13	20	117	34	147	81	0.173

Nozzle: nickel-plated brass

Progressive flow depending on the trigger position

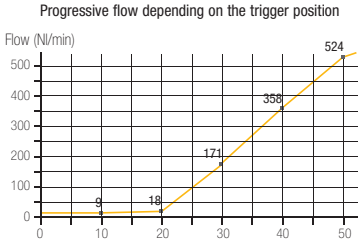


Flow (Nl/min)

Pressure: 6 bar


Trigger position (mm)

- 524 Nl/min Flow produced with nozzle 0690 06 01
- 86 dBA
- OSHA 1910.242 (b)  
OSHA 1910.95 (b)  
2003/10/EC directive:  
Requirement to use ear protection if exposure > 8 hours

## 0657 Safety Progressive Control Blowgun, Upper Connection with Short Angled Nozzle, Female BSPP




Technical polymer, nickel-plated brass, NBR



C	DN	F	H	H1	L	L1	kg	
G1/4	2.5	0657 66 13	20	117	37	145	82	0.168

Nozzle: nickel-plated brass

Progressive flow depending on the trigger position

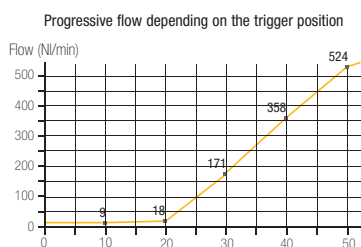

Flow (Nl/min)

Pressure: 6 bar

Trigger position (mm)

- 524 Nl/min Flow produced with nozzle 0690 06 01
- 86 dBA
- OSHA 1910.242 (b)  
OSHA 1910.95 (b)  
2003/10/EC directive:  
Requirement to use ear protection if exposure > 8 hours