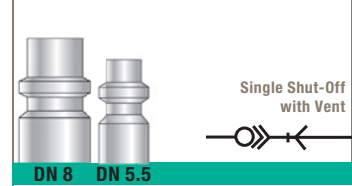





ISO B Profile






9416U Coupler, Bulkhead Mountable, Female BSPP Thread

	Technical polymer, nickel-plated brass, NBR 	(DN) C 	E	F	G	K _{max}	L1	L2	ØT _{min}	kg
		5.5 G1/4 9416U06 13	12	22	31.5	6	12.5	68.5	18.5	0.105
		8 G3/8 9416U08 17	12	24	36.5	7	14.5	76	22.5	0.150




C 9000 Series ISO B (DN 5.5): single shut-off = 1250 NI/min
C 9000 Series ISO B (DN 8): single shut-off = 2400 NI/min

9440U Y Coupler, Female BSPP Thread

	Technical polymer, nickel-plated brass, NBR 	(DN) C 	E	F	F1	G	H	H1	kg
		5.5 G3/8 9440U06 17	11.5	19	20	31.5	70	16	0.207
		8 G1/2 9440U08 21	14	22	25	36.5	80	19	0.352




C 9000 Series ISO B (DN 5.5): single shut-off = 1250 NI/min
C 9000 Series ISO B (DN 8): single shut-off = 2400 NI/min

9087U Probe, Straight-Through, Male BSPP Thread

	Nickel-plated steel, technical polymer 	(DN) C 	E	F	L	L1	kg
		5.5 G1/4 9087U06 13	9	17	38	24	0.025
		G3/8 9087U06 17	9	19	38	24	0.032
		G1/2 9087U06 21	12	22	42	24	0.048
		8 G1/4 9087U08 13	9	17	38	24	0.030
		G3/8 9087U08 17	9	19	39	24	0.036
G1/2 9087U08 21	12	22	42	24	0.058		




Probe without shut-off

9086U Probe, Straight-Through, Female BSPP Thread

	Nickel-plated steel 	(DN) C 	E	F	L	L1	kg
		5.5 G1/4 9086 23 13	9	17	36	24	0.025
		G3/8 9086 23 17	9	19	36	24	0.025
		G1/2 9086 23 21	12	24	39	24	0.039

Probe without shut-off

9086U Probe, Straight-Through, Female BSPP Thread

	Nickel-plated steel 	(DN) C 	E	F	L	L1	kg
		8.5 G1/4 9086 30 13	10	17	40	28	0.032
		G3/8 9086 30 17	10	19	42	28	0.035
		G1/2 9086 30 21	12	24	43	28	0.046

Probe without shut-off
30 Series probe (DN 8.5) compatible with ISO B series C 9000 couplers (DN 8)