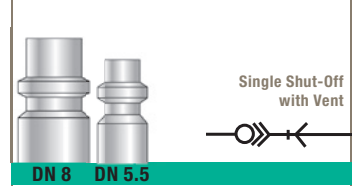








ISO B Profile



9080U Probe, Straight-Through, LF 3000® Push-In Connection, with Spiral Protection Spring

	Nickel-plated steel, NBR 		DN	ØD		G	L	L1	kg
			5.5	8	9080U06 08	24	112	24	0.052
				10	9080U06 10	24	112	24	0.044
			8	10	9080U08 10	24	114	26	0.095
				12	9080U08 12	29.5	125	26	0.096
Probe without shut-off									

9094U Probe, Straight-Through, with Hosetail

	Nickel-plated steel 		DN	ØD		F	L	L1	L2	kg
			5.5	6	9094U06 06	14	51	24	25	0.016
				8	9094U06 08	14	51	27	25	0.017
				10	9094U06 10	14	51	24	25	0.018
			8	8	9094U08 08	17	51	24	25	0.027
				10	9094U08 10	17	51	27	25	0.028
				13	9094U08 13	17	51	24	25	0.031
Probe without shut-off										