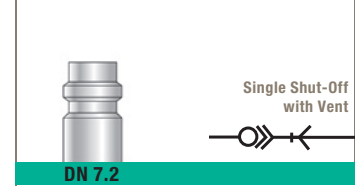






# European Profile







## 9401E Coupler, Male BSPP Thread

	Technical polymer, nickel-plated brass, NBR 		<b>C</b>		<b>E</b>	<b>F</b>	<b>G</b>	<b>L</b>	<b>kg</b>								
										G1/4	<a href="#">9401E07 13</a>	6.5	22	36.5	80	0.124	
										7.2	G3/8	<a href="#">9401E07 17</a>	7.5	22	36.5	81	0.122
											G1/2	<a href="#">9401E07 21</a>	9	25	36.5	83.5	0.136





C 9000 Series: single shut-off = 2000 NI/min

## 9414E Coupler, Female BSPP Thread

	Technical polymer, nickel-plated brass, NBR 		<b>C</b>		<b>E</b>	<b>F</b>	<b>G</b>	<b>L</b>	<b>kg</b>								
										G1/4	<a href="#">9414E07 13</a>	12	22	36.5	73	0.118	
										7.2	G3/8	<a href="#">9414E07 17</a>	12	22	36.5	73	0.109
											G1/2	<a href="#">9414E07 21</a>	15	27	36.5	78	0.130





C 9000 Series: single shut-off = 2000 NI/min

## 9410E Coupler, LF 3000® Push-In Connection, with Spiral Protection Spring

	Technical polymer, nickel-plated brass, NBR 		<b>ØD</b>		<b>G</b>	<b>L</b>	<b>L1</b>	<b>kg</b>						
									10	<a href="#">9410E07 10</a>	36.5	151	63	0.175
									7.2	12	<a href="#">9410E07 12</a>	36.5	151	63





C 9000 Series: single shut-off = 2000 NI/min

## 9421E Coupler with Hosetail

	Technical polymer, nickel-plated brass, NBR 		<b>ØD</b>		<b>F</b>	<b>G</b>	<b>L</b>	<b>L1</b>	<b>kg</b>								
										8	<a href="#">9421E07 08</a>	22	36.5	93	26	0.113	
										7.2	10	<a href="#">9421E07 10</a>	22	36.5	93	26	0.114
											13	<a href="#">9421E07 13</a>	22	36.5	97	30	0.119

C 9000 Series: single shut-off = 2000 NI/min

## 9416E Coupler, Bulkhead Mountable, Female BSPP Thread

	Technical polymer, nickel-plated brass, NBR 		<b>C</b>		<b>E</b>	<b>F</b>	<b>G</b>	<b>K<sub>max</sub></b>	<b>L1</b>	<b>L2</b>	<b>ØT<sub>min</sub></b>	<b>kg</b>											
													7.2	G3/8	<a href="#">9416E07 17</a>	12	24	36.5	7	14.5	74	22.5	0.153

C 9000 Series: single shut-off = 2000 NI/min