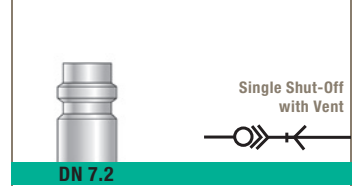








European Profile






9440E Y Coupler, Female BSPP Thread

	Technical polymer, nickel-plated brass, NBR 	DN C 	E F F1 G H H1 kg
C 9000 Series: single shut-off = 2000 NI/min			




9087E Probe, Straight-Through, Male BSPP Thread

	Nickel-plated steel, technical polymer 	DN C 	E F L L1 kg
Probe without shut-off			




9086E Probe, Straight-Through, Female BSPP Thread

	Nickel-plated steel 	DN C 	E F L L1 kg
Probe without shut-off			

9080E Probe, Straight-Through, LF 3000® Push-In Connection, with Spiral Protection Spring

	Nickel-plated steel, NBR 	DN ØD 	G L L1 kg
Probe without shut-off			

9094E Probe, Straight-Through, with Hosetail

	Nickel-plated steel 	DN ØD 	F L L1 L2 kg
Probe without shut-off			