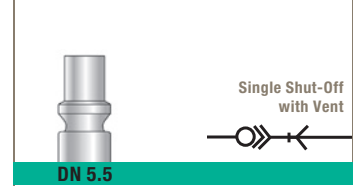










ARO Profile







9401A Coupler, Male BSPP Thread

	Technical polymer, nickel-plated brass, NBR 	 C 	E	F	G	L	kg
		G1/4 9401A06 13	6.5	17	31.5	70.5	0.105
		5.5 G3/8 9401A06 17	9	21	31.5	73.5	0.123
		G1/2 9401A06 21	9	25	31.5	70.5	0.150
C 9000 series: single shut-off = 1250 NI/min							





9405A Coupler, Male BSPT Thread

	Technical polymer, nickel-plated brass, NBR 	 C 	F	G	L	kg
		R1/4 9405A06 13	17	31.5	73	0.105
		5.5 R3/8 9405A06 17	19	31.5	74.5	0.110
		R1/2 9405A06 21	22	31.5	79.5	0.140
C 9000 series: single shut-off = 1250 NI/min						





9414A Coupler, Female BSPP Thread

	Technical polymer, nickel-plated brass, NBR 	 C 	E	F	G	L	kg
		G1/4 9414A06 13	12	17	31.5	64.5	0.095
		5.5 G3/8 9414A06 17	12	22	31.5	70	0.115
		G1/2 9414A06 21	15	27	31.5	76	0.145
C 9000 series: single shut-off = 1250 NI/min							

9410A Coupler, LF 3000® Push-In Connection, with Spiral Protection Spring

	Technical polymer, nickel-plated brass, NBR 	 ØD 	G	L	L1	kg
		8 9410A06 08	31.5	143	54	0.140
		5.5 10 9410A06 10	31.5	143	54	0.175
C 9000 series: single shut-off = 1250 NI/min						

9421A Coupler with Hosetail

	Technical polymer, nickel-plated brass, NBR 	 ØD 	F	G	L	L1	kg
		6 9421A06 06	17	31.5	86.5	26	0.110
		5.5 8 9421A06 08	17	31.5	86.5	26	0.100
		10 9421A06 10	17	31.5	86.5	26	0.100
C 9000 series: single shut-off = 1250 NI/min							