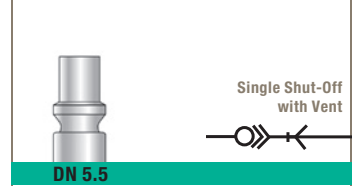








ARO Profile






9416A Coupler, Bulkhead Mountable, Female BSPP Thread

	Technical polymer, nickel-plated brass, NBR 	DN C 	E F G K L1 L2 ØT kg
C 9000 series: single shut-off = 1250 NI/min			




9440A Y Coupler, Female BSPP Thread

	Technical polymer, nickel-plated brass, NBR 	DN C 	E F F1 G H H1 kg
C 9000 series: single shut-off = 1250 NI/min			




9087A Probe, Straight-Through, Male BSPP Thread

	Nickel-plated steel, technical polymer 	DN C 	E F L L1 kg		
				G1/4 9087A06 13	9 17 36 22 0.020
				5.5 G3/8 9087A06 17	9 19 36 22 0.024
				G1/2 9087A06 21	12 24 40 22 0.039
Probe without shut-off					

9086A Probe, Straight-Through, Female BSPP Thread

	Nickel-plated steel 	DN C 	E F L L1 kg		
				G1/4 9086 22 13	9 17 35.5 22 0.024
				5.5 G3/8 9086 22 17	10 19 35.5 22 0.023
				G1/2 9086 22 21	12 24 38 22 0.039
Probe without shut-off					

9084A Probe, Straight-Through, Male BSPT Thread

	Nickel-plated steel 	DN C 	F L L1 kg		
				R1/4 9084 22 13	14 40.5 22 0.020
				5.5 R3/8 9084 22 17	17 40.5 22 0.031
				R1/2 9084 22 21	22 46 22 0.048
Probe without shut-off					