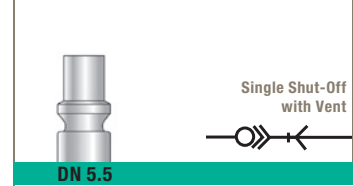








ARO Profile



9080A Probe, Straight-Through, LF 3000® Push-In Connection, with Spiral Protection Spring

	Nickel-plated steel, NBR 	DN ØD 	G	L	L1	kg
		5.5 8 9080A06 08	24	118	22	0.028
		10 10 9080A06 10	24	118	22	0.027
Probe without shut-off						

9094A Probe, Straight-Through, with Hosetail

	Nickel-plated steel 	DN ØD 	F	L	L1	L2	kg
		5.5 6 9094A06 06	14	48.5	22	25	0.012
		8 8 9094A06 08	14	48.5	22	25	0.014
10 10 9094A06 10	14	48.5	22	25	0.016		
Probe without shut-off							