












# ARO Profile

## 14 and 22 Series












### 9101 Coupler, Male BSPP Thread

	Nickel-plated brass, NBR																
	G1/4	<a href="#">9101 14 13</a>										9	22	27	43	0.080	
	5.5	G3/8										<a href="#">9101 14 17</a>	9	22	27	43	0.081
		G1/2										<a href="#">9101 14 21</a>	12	24	27	46	0.093











14 Series (DN 5.5): single shut-off = 560 NI/min

### 9105 Coupler, Male BSPT Thread

	Nickel-plated brass, NBR														
		R1/4									<a href="#">9105 22 13</a>	19	23	61	0.098
	5.5	R3/8									<a href="#">9105 22 17</a>	12	19	60	0.096
		R1/2									<a href="#">9105 22 21</a>	22	23	61	0.114











22 Series (DN 5.5): single shut-off = 800 NI/min

### 9114 Coupler, Female BSPP Thread

	Nickel-plated brass, NBR																
		G1/4										<a href="#">9114 14 13</a>	9	22	27	43	0.095
	5.5	G3/8										<a href="#">9114 14 17</a>	9	22	27	43	0.091
		G1/2										<a href="#">9114 14 21</a>	12	24	27	46	0.098











14 Series (DN 5.5): single shut-off = 560 NI/min

### 9114 Coupler, Female BSPP Thread

	Nickel-plated brass, NBR																
		G1/4										<a href="#">9114 22 13</a>	9	19	23	56	0.098
	5.5	G3/8										<a href="#">9114 22 17</a>	9	19	23	55	0.091
		G1/2										<a href="#">9114 22 21</a>	12	24	23	58	0.123

22 Series (DN 5.5): single shut-off = 800 NI/min

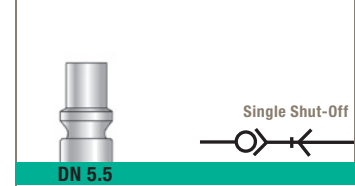
### 9123 Coupler with Barb Connection

	Nickel-plated brass, NBR																
		6										<a href="#">9123 14 06</a>	21	27	60	25	0.080
		8										<a href="#">9123 14 08</a>	21	27	60	25	0.081
	5.5	9										<a href="#">9123 14 09</a>	21	27	60	25	0.082
		10										<a href="#">9123 14 10</a>	21	27	60	25	0.082
		13										<a href="#">9123 14 13</a>	21	27	60	25	0.094

14 Series (DN 5.5): single shut-off = 560 NI/min

# ARO Profile

## 14 and 22 Series



### 9123 Coupler with Barb Connection

	Nickel-plated brass, NBR 	(DN) <b>ØD</b>	<b>F</b>	<b>G</b>	<b>L</b>	<b>L1</b>	<b>kg</b>		
		6	<a href="#">9123 22 06</a>	19	23	74	25	0.093	
		5.5	8	<a href="#">9123 22 08</a>	19	23	74	25	0.097
		10	<a href="#">9123 22 10</a>	19	23	74	25	0.098	
22 Series (DN 5.5): single shut-off = 800 NI/min									

### 9084 Probe, Straight-Through, Male BSPT Thread

	Nickel-plated steel 	(DN) <b>C</b>	<b>F</b>	<b>L</b>	<b>L1</b>	<b>kg</b>		
		R1/4	<a href="#">9084 22 13</a>	14	40.5	22	0.020	
		5.5	R3/8	<a href="#">9084 22 17</a>	17	40.5	22	0.031
		R1/2	<a href="#">9084 22 21</a>	22	46	22	0.048	
Probe without shut-off 22 Series probe (DN 5.5) compatible with 14 Series coupler (DN 5.5)								

### 9086 Probe, Straight-Through, Female BSPP Thread

	Nickel-plated steel 	(DN) <b>C</b>	<b>E</b>	<b>F</b>	<b>L</b>	<b>L1</b>	<b>kg</b>		
		G1/4	<a href="#">9086 22 13</a>	9	17	35.5	22	0.024	
		5.5	G3/8	<a href="#">9086 22 17</a>	10	19	35.5	22	0.023
		G1/2	<a href="#">9086 22 21</a>	12	24	38	22	0.039	
Probe without shut-off 22 Series probe (DN 5.5) compatible with 14 Series coupler (DN 5.5)									

### 9085 Probe, Straight-Through, with Barb Connection

	Nickel-plated steel 	(DN) <b>ØD</b>	<b>L</b>	<b>L1</b>	<b>L2</b>	<b>kg</b>		
		6	<a href="#">9085 22 06</a>	48.5	22	25	0.012	
		8	<a href="#">9085 22 08</a>	48.5	22	25	0.014	
		5.5	9	<a href="#">9085 22 09</a>	48.5	22	25	0.014
		10	<a href="#">9085 22 10</a>	48.5	22	25	0.016	
		13	<a href="#">9085 22 13</a>	48.5	22	25	0.022	
Probe without shut-off 22 Series probe (DN 5.5) compatible with 14 Series coupler (DN 5.5)								