


Asian Profile

13 Series

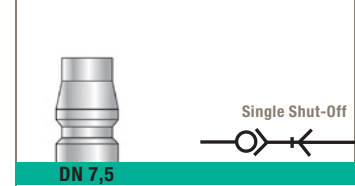

9105 Coupler, Male BSPT Thread

	Nickel-plated brass, NBR		DN	C		F	G	L	kg
			7.5	R1/4	9105 13 13	22	27	49	0.086
				R3/8	9105 13 17	22	27	49	0.090
				R1/2	9105 13 21	22	27	53	0.110
13 Series (DN 7.5): single shut-off = 1150 NL/min									

9114 Coupler, Female BSPP Thread

	Nickel-plated brass, NBR		DN	C		E	F	G	L	kg
			7.5	G1/4	9114 13 13	9	22	27	45	0.099
				G3/8	9114 13 17	9	22	27	45	0.093
				G1/2	9114 13 21	12	24	27	48	0.102
13 Series (DN 7.5): single shut-off = 1150 NL/min										

9123 Coupler with Barb Connection

	Nickel-plated brass, NBR		DN	ØD		F	G	L	L1	kg
			7.5	8	9123 13 08	21	27	62	25	0.084
				10	9123 13 10	21	27	62	25	0.086
				13	9123 13 13	21	27	62	25	0.089
13 Series (DN 7.5): single shut-off = 1150 NL/min										

9084 Probe, Straight-Through, Male BSPT Thread

	Nickel-plated steel		DN	C		F	L	L1	kg
			7.5	R1/4	9084 13 13	14	37	12	0.022
				R3/8	9084 13 17	17	37	12	0.028
				R1/2	9084 13 21	22	44	17	0.050
Probe without shut-off									

9086 Probe, Straight-Through, Female BSPP Thread

	Nickel-plated steel		DN	C		E	F	L	L1	kg
			7.5	G1/4	9086 13 13	9	17	22	12	0.026
				G3/8	9086 13 17	9	19	33	12	0.024
				G1/2	9086 13 21	12	24	36	17	0.036
Probe without shut-off										

9085 Probe, Straight-Through, with Barb Connection

	Nickel-plated steel		DN	ØD		L	L1	kg
			7.5	8	9085 13 08	48	25	0.020
				10	9085 13 10	48	25	0.021
				13	9085 13 13	48	25	0.026
Probe without shut-off								