


UK Profile

17 Series

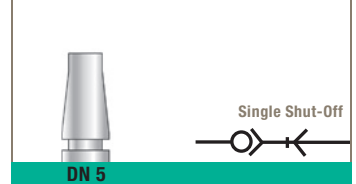

9105 Coupler, Male BSPT Thread

	Nickel-plated brass, NBR		DN	C		F	G	L	kg
				R1/4	9105 17 13	19	23	63	0.109
			5	R3/8	9105 17 17	19	23	62	0.108
				R1/2	9105 17 21	22	23	63	0.124
17 Series (DN 5) : Single shut-off = 870 NI/min									

9114 Coupler, Female BSPP Thread

	Nickel-plated brass, NBR		DN	C		E	F	G	L	kg
				G1/4	9114 17 13	9	19	23	58	0.110
			5	G3/8	9114 17 17	9	19	23	57	0.103
				G1/2	9114 17 21	12	24	23	60	0.135
17 Series (DN 5) : Single shut-off = 870 NI/min										

9123 Coupler with Barb Connection

	Nickel-plated brass, NBR		DN	ØD		F	G	L	L1	kg
				6	9123 17 06	19	23	76	25	0.106
			5	8	9123 17 08	19	23	76	25	0.108
				10	9123 17 10	19	23	76	25	0.111
17 Series (DN 5): single shut-off = 870 NI/min										

9084 Probe, Straight-Through, Male BSPT Thread

	Nickel-plated steel		DN	C		F	L	L1	kg
				R1/8	9084 17 10	11	37	9	0.016
			5	R1/4	9084 17 13	14	42	12	0.021
				R3/8	9084 17 17	17	42	12	0.014
				R1/2	9084 17 21	22	48	17	0.048
Probe without shut-off									

9086 Probe, Straight-Through, Female BSPP Thread

	Nickel-plated steel		DN	C		E	F	L	kg
				G1/8	9086 17 10	7	14	33	0.016
			5	G1/4	9086 17 13	9	17	33	0.022
				G3/8	9086 17 17	9	19	33	0.023
				G1/2	9086 17 21	12	24	36	0.030
Probe without shut-off									

9085 Probe, Straight-Through, with Barb Connection

	Nickel-plated steel		DN	ØD		L	L1	L2	kg
				6	9085 17 06	58	25	33	0.015
			5	8	9085 17 08	52	25	27	0.016
				10	9085 17 10	52	25	27	0.018
Probe without shut-off									