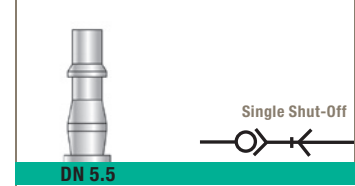





UK Profile




19 Series






9105 Coupler, Male BSPT Thread

	Nickel-plated brass, NBR 	(DN) C		F	G	L	kg	
		R1/4	9105 19 13	19	23	63	0.100	
		5.5	R3/8	9105 19 17	19	23	62	0.099
			R1/2	9105 19 21	22	23	68	0.117
19 Series (DN 5.5): single shut-off = 660 NI/min								




9114 Coupler, Female BSPP Thread

	Nickel-plated brass, NBR 	(DN) C		E	F	G	L	kg	
		G1/4	9114 19 13	9	19	23	58	0.102	
		5.5	G3/8	9114 19 17	9	19	23	58	0.095
			G1/2	9114 19 21	12	24	23	60	0.127
19 Series (DN 5.5): single shut-off = 660 NI/min									




9123 Coupler with Barb Connection

	Nickel-plated brass, NBR 	(DN) ØD		F	G	L	L1	kg	
		6	9123 19 06	19	23	76	25	0.097	
		5.5	8	9123 19 08	19	23	76	25	0.099
			10	9123 19 10	24	23	76	25	0.100
19 Series (DN 5.5): single shut-off = 660 NI/min									




9084 Probe, Straight-Through, Male BSPT Thread

	Nickel-plated steel 	(DN) C		F	L	L1	kg	
		R1/4	9084 19 13	14	50	12	0.022	
		5.5	R3/8	9084 19 17	17	50	12	0.026
			R1/2	9084 19 21	22	56	17	0.051
Probe without shut-off								

9086 Probe, Straight-Through, Female BSPP Thread

	Nickel-plated steel 	(DN) C		E	F	L	kg	
		G1/4	9086 19 13	9	17	46	0.025	
		5.5	G3/8	9086 19 17	9	19	47	0.026
			G1/2	9086 19 21	12	24	50	0.039
Probe without shut-off								

9085 Probe, Straight-Through, with Barb Connection

	Nickel-plated steel 	(DN) ØD		L	L1	L2	kg	
		6	9085 19 06	60	25	35	0.016	
		5.5	8	9085 19 08	60	25	35	0.017
			10	9085 19 10	60	25	35	0.019
Probe without shut-off								