


# German Profile

## 20 Series

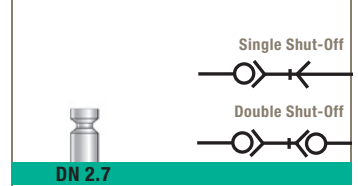

### 9201 Coupler, Male BSPP and Metric Thread

	Nickel-plated brass, NBR 	<b>C</b>	<b>E</b>	<b>F</b>	<b>G</b>	<b>L</b>	<b>kg</b>			
			2.7	M5x0.8	<a href="#">9201 20 19</a>	5	9	10	26	0.009
				G1/8	<a href="#">9201 20 10</a>	7	11	10	28	0.012
20 Series (DN 2.7): single shut-off = 165 NI/min 20 Series (DN 2.7): double shut-off = 130 NI/min										

### 9214 Coupler, Female BSPP and Metric Thread

	Nickel-plated brass, NBR 	<b>C</b>	<b>E</b>	<b>F</b>	<b>G</b>	<b>L</b>	<b>kg</b>			
			2.7	M5x0.8	<a href="#">9214 20 19</a>	5	9	10	25	0.010
				G1/8	<a href="#">9214 20 10</a>	7	12	10	28	0.013
20 Series (DN 2.7): single shut-off = 165 NI/min 20 Series (DN 2.7): double shut-off = 130 NI/min										

### 9226 Coupler, Bulkhead Mountable, with Barb Connection

	Nickel-plated brass, NBR 	<b>ØD</b>	<b>F1</b>	<b>F2</b>	<b>G</b>	<b>L</b>	<b>L1</b>	<b>L2</b>	<b>kg</b>	
			2.7	3	11	10	51	17	13	0.015
				4	11	10	51	17	13	0.016
20 Series (DN 2.7): single shut-off = 165 NI/min 20 Series (DN 2.7): double shut-off = 130 NI/min										

### 9087 Probe, Straight-Through, Male BSPP and Metric Thread

	Nickel-plated brass 	<b>C</b>	<b>E</b>	<b>F</b>	<b>L</b>	<b>L1</b>	<b>kg</b>			
			2.7	M5x0.8	<a href="#">9087 20 19</a>	5	7	18	10	0.002
				G1/8	<a href="#">9087 20 10</a>	7	11	18	10	0.005
Probe without shut-off										

### 9287 Probe, Valved, Male BSPP and Metric Thread

	Nickel-plated brass, NBR 	<b>C</b>	<b>E</b>	<b>F</b>	<b>L</b>	<b>L1</b>	<b>kg</b>			
			2.7	M5x0.8	<a href="#">9287 20 19</a>	5	7	28	10	0.006
				G1/8	<a href="#">9287 20 10</a>	7	11	30	10	0.009
Probe with shut-off										