


German Profile

20 Series

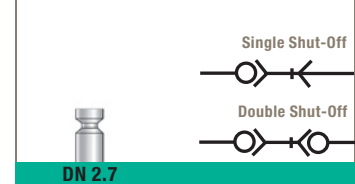

9086 Probe, Straight-Through, Female BSPP and Metric Thread

	Nickel-plated brass		C	E	F	L	L1	kg		
			2.7	M5x0.8	9086 20 19	5	7	17	10	0.003
				G1/8	9086 20 10	7	12	19	10	0.006
Probe without shut-off										

9286 Probe, Valved, Female BSPP and Metric Thread

	Nickel-plated brass, NBR		C	E	F	L	L1	kg		
			2.7	M5x0.8	9286 20 19	5	7	27	10	0.007
				G1/8	9286 20 10	7	12	30	10	0.010
Probe with shut-off										

9085 Probe, Straight-Through, with Barb Connection

	Nickel-plated brass		ØD	L	L1	L2	kg		
				3	9085 20 03	24	10	13	0.002
			2.7	4	9085 20 04	24	10	13	0.002
				5	9085 20 05	24	9	13	0.003
Probe without shut-off									

9285 Probe, Valved, with Barb Connection

	Nickel-plated brass, NBR		ØD	L	L1	L2	kg		
				3	9285 20 03	37	10	13	0.007
			2.7	4	9285 20 04	37	10	13	0.007
				5	9285 20 05	37	10	13	0.007
Probe with shut-off									

9095 Probe, Straight-Through, Bulkhead Mountable, with Barb Connection

	Nickel-plated brass		ØD	F	L	L1	L2	L3	kg		
			2.7	3	9095 20 03	11	44	10	17	13	0.012
				4	9095 20 04	11	44	10	17	13	0.012
			Probe without shut-off								