





German Profile




21 Series






9201 Coupler, Male BSPP Thread

	Nickel-plated brass, NBR 	DN C 	E F G L kg
21 Series (DN 5): single shut-off = 560 Nl/min 21 Series (DN 5): double shut-off = 310 Nl/min			




9214 Coupler, Female BSPP Thread

	Nickel-plated brass, NBR 	DN C 	E F G L kg
21 Series (DN 5): single shut-off = 560 Nl/min 21 Series (DN 5): double shut-off = 310 Nl/min			




9223 Coupler with Barb Connection

	Nickel-plated brass, NBR 	DN ØD 	F G L L1 kg
21 Series (DN 5): single shut-off = 560 Nl/min 21 Series (DN 5): double shut-off = 310 Nl/min			




9226 Coupler, Bulkhead Mountable, with Barb Connection

	Nickel-plated brass, NBR 	DN ØD 	F1 F2 G L L1 L2 kg
21 Series (DN 5): single shut-off = 560 Nl/min 21 Series (DN 5): double shut-off = 310 Nl/min			

9087 Probe, Straight-Through, Male BSPP Thread

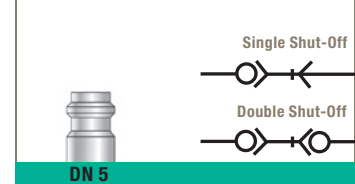
	Nickel-plated brass 	DN C 	E F L L1 kg
Probe without shut-off			

9287 Probe, Valved, Male BSPP Thread

	Nickel-plated brass, NBR 	DN C 	E F L L1 kg
Probe with shut-off			

German Profile

21 Series



9086 Probe, Straight-Through, Female BSPP Thread

	Nickel-plated brass		DN	C		E	F	L	L1	kg
			5	G1/8	9086 21 10	8	14	25	14	0.014
				G1/4	9086 21 13	9	17	26	14	0.018
Probe without shut-off										

9286 Probe, Valved, Female BSPP Thread

	Nickel-plated brass, NBR		DN	C		E	F	L	L1	kg
			5	G1/8	9286 21 10	8	14	40	14	0.025
				G1/4	9286 21 13	9	17	42	14	0.035
Probe with shut-off										

9085 Probe, Straight-Through, with Barb Connection

	Nickel-plated brass		DN	$\emptyset D$		L	L1	L2	kg
			5	4	9085 21 04	32	14	17	0.006
				6	9085 21 06	32	14	17	0.008
				8	9085 21 08	32	14	17	0.009
Probe without shut-off									

9285 Probe, Valved, with Barb Connection

	Nickel-plated brass, NBR		DN	$\emptyset D$		F	L	L1	L2	kg
			5	4	9285 21 04	14	50	14	17	0.022
				6	9285 21 06	14	50	14	17	0.023
				8	9285 21 08	14	50	14	17	0.024
Probe with shut-off										

9095 Probe, Straight-Through, Bulkhead Mountable with Barb Connection

	Nickel-plated brass		DN	$\emptyset D$		F1	F2	L	L1	L2	L3	kg
			5	4	9095 21 04	14	14	50	14	14	17	0.019
				6	9095 21 06	14	17	50	14	14	17	0.027
				8	9095 21 08	14	17	50	14	14	17	0.028
Probe without shut-off												