


# Stainless Steel European Profile

## X25 and X27 Series

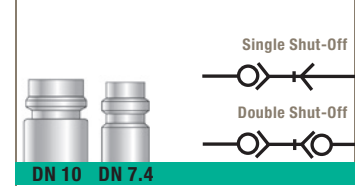

### 9201 Coupler, Male BSPP Thread

	Stainless steel 316L, FKM		<b>DN</b>	<b>C</b>		<b>E</b>	<b>F</b>	<b>G</b>	<b>L</b>	<b>kg</b>
			7.4	G1/4	<a href="#">9201X25 13</a>	10.5	19	23	59	0.095
				G3/8	<a href="#">9201X25 17</a>	9	19	23	57.5	0.094
				G1/2	<a href="#">9201X25 21</a>	12	24	23	60.5	0.131
			10	G3/8	<a href="#">9201X27 17</a>	9	24	27	57.5	0.131
				G1/2	<a href="#">9201X27 21</a>	12	24	27	59.5	0.134
				G3/4	<a href="#">9201X27 27</a>	16	32	27	60.5	0.171

X25 Series (DN 7.4): single shut-off = 1800 NI/min / X25 Series (DN 7.4): double shut-off = 710 NI/min  
X27 Series (DN 10): single shut-off = 2400 NI/min / X27 Series (DN 10): double shut-off = 900 NI/min

### 9214 Coupler, Female BSPP Thread

	Stainless steel 316L, FKM		<b>DN</b>	<b>C</b>		<b>E</b>	<b>F</b>	<b>G</b>	<b>L</b>	<b>kg</b>
			7.4	G1/4	<a href="#">9214X25 13</a>	10	19	23	56	0.096
				G3/8	<a href="#">9214X25 17</a>	9	19	23	55	0.089
				G1/2	<a href="#">9214X25 21</a>	12	24	23	58	0.119
			10	G3/8	<a href="#">9214X27 17</a>	11	24	27	56	0.140
				G1/2	<a href="#">9214X27 21</a>	12	24	27	56	0.127
				G3/4	<a href="#">9214X27 27</a>	16	32	27	60	0.191

X25 Series (DN 7.4): single shut-off = 1800 NI/min / X25 Series (DN 7.4): double shut-off = 710 NI/min  
X27 Series (DN 10): single shut-off = 2400 NI/min / X27 Series (DN 10): double shut-off = 900 NI/min

### 9287 Probe, Valved, Male BSPP Thread

	Stainless steel 316L, FKM		<b>DN</b>	<b>C</b>		<b>E</b>	<b>F</b>	<b>L</b>	<b>L1</b>	<b>kg</b>
			7.4	G1/4	<a href="#">9287X25 13</a>	10	19	43	20	0.052
				G3/8	<a href="#">9287X25 17</a>	9	19	43	20	0.053
				G1/2	<a href="#">9287X25 21</a>	12	24	46	20	0.089
			10	G3/8	<a href="#">9287X27 17</a>	9	24	58	22	0.080
				G1/2	<a href="#">9287X27 21</a>	12	24	58	22	0.084
				G3/4	<a href="#">9287X27 27</a>	16	32	62	22	0.122

Probe with shut-off

### 9087 Probe, Straight-Through, Male BSPP Thread

	Stainless steel 316L		<b>DN</b>	<b>C</b>		<b>E</b>	<b>F</b>	<b>L</b>	<b>L1</b>	<b>kg</b>
			7.4	G1/4	<a href="#">9087X25 13</a>	9	17	34	20	0.018
				G3/8	<a href="#">9087X25 17</a>	9	19	34	20	0.014
				G1/2	<a href="#">9087X25 21</a>	12	24	36	20	0.047
			10	G3/8	<a href="#">9087X27 17</a>	9	19	37	22	0.013
				G1/2	<a href="#">9087X27 21</a>	12	24	40	22	0.052
				G3/4	<a href="#">9087X27 27</a>	16	32	45	22	0.086

Probe without shut-off

### 9286 Probe, Valved, Female BSPP Thread

	Stainless steel 316L, FKM		<b>DN</b>	<b>C</b>		<b>E</b>	<b>F</b>	<b>L</b>	<b>L1</b>	<b>kg</b>
			7.4	G1/4	<a href="#">9286X25 13</a>	10	19	54	20	0.056
				G3/8	<a href="#">9286X25 17</a>	9	19	53	20	0.049
				G1/2	<a href="#">9286X25 21</a>	12	24	56	20	0.079
			10	G3/8	<a href="#">9286X27 17</a>	9	24	55	22	0.090
				G1/2	<a href="#">9286X27 21</a>	12	24	55	22	0.080
				G3/4	<a href="#">9286X27 27</a>	16	24	58	22	0.140

Probe with shut-off

### 9086 Probe, Straight-Through, Female BSPP Thread

	Stainless steel 316L		<b>DN</b>	<b>C</b>		<b>E</b>	<b>F</b>	<b>L</b>	<b>L1</b>	<b>kg</b>
			7.4	G1/4	<a href="#">9086X25 13</a>	12	10	33	20	0.023
				G3/8	<a href="#">9086X25 17</a>	12	10	33	20	0.022
				G1/2	<a href="#">9086X25 21</a>	14	12	35	20	0.035
			10	G3/8	<a href="#">9086X27 17</a>	9	19	33	22	0.026
				G1/2	<a href="#">9086X27 21</a>	12	24	37	22	0.037
				G3/4	<a href="#">9086X27 27</a>	16	32	42	22	0.091

Probe without shut-off