





ACUATEC

6" BOREHOLES

The **Acuatec** series are multi stage pumps for use in a variety of applications where a good flow, at a high pressure, is required. They are suitable for pumping potable water and water containing up to 60 g/m³ of suspended solids. They have a 304 stainless steel body and strainer with thermoplastic diffusers and impellers. Each pump stage is fitted with a 304 stainless steel ring for enhanced wear resistance. The 420 stainless steel shaft is fitted with a mechanical seal, intermediate oil chamber and inner lip seal, which offer excellent wear resistance. For simple and easy installation this series features integral motor protection and starting capacitors. All models are supplied with 20 metres of heavy duty rubber power cable. Available with or without a float switch, flow on the manual versions (no float switch) can alternatively be controlled by including a pressure controller in the delivery line (see pages 67 to 69).

- Industry
- Agriculture
- Irrigation
- Potable water
- Processing
- Spraying

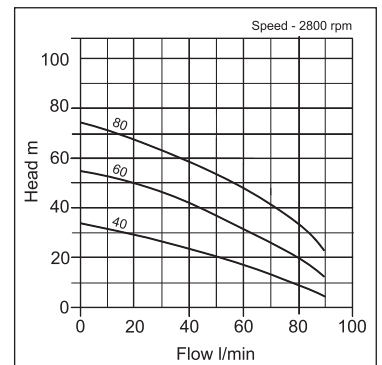

Acuatec manual



Acuatec auto

model	Manual or Auto	outlet (FBSP)	kW	volt	flow (l/min)	head (mtrs)	dia x h (mm)	bore hole (size)	dry weight (kgs)	packing weight (kgs)	Price (£)	code
Acuatec 40	M	1 1/4"	0.60	230	90	33	Ø127x420	6" +	12.00	13.70	290.00	1
Acuatec 40	A	1 1/4"	0.60	230	90	33	Ø127x420	6" +	12.30	14.00	299.00	1
Acuatec 60	M	1 1/4"	0.90	230	90	55	Ø127x490	6" +	13.00	14.70	325.00	1
Acuatec 60	A	1 1/4"	0.90	230	90	55	Ø127x490	6" +	13.30	15.00	334.00	1
Acuatec 80	M	1 1/4"	1.20	230	90	75	Ø127x570	6" +	15.00	16.70	391.00	1
Acuatec 80	A	1 1/4"	1.20	230	90	75	Ø127x570	6" +	15.30	17.00	400.00	1