



## Hydraulic Hose Range

Page Tech Sheet **5010**

### Oil Return/Fuel Hose SAE 100R6


#### 100R6 Hose

##### Application:

- Low pressure hydraulic applications, for use with push style fittings. See page 36

##### Specification:

- SAE100 R6, exceeds EN854

 **Temperature Range:**  
-40°C to +100°C.

##### Construction:

- Inner tube: oil resistant synthetic rubber (NBR)
- Reinforcement: 1 single textile yarn braid
- Outer cover: oil & weather resistant synthetic rubber

##### Recommended Fluids:

- Hose suitable for petroleum based hydraulic oil and water-glycol based fluids, air and water

Available per 1mtr

#### 50 Metre Coils, Black

0303	ID	OD mm	bar	mm	bar	£
100R6-04-50	1/4"	13.5	28	65	112	144.10
100R6-05-50	5/16"	15.1	28	75	112	192.20
100R6-06-50	3/8"	16.7	28	75	112	226.95
100R6-08-50	1/2"	20.6	28	100	112	310.85
100R6-10-50	5/8"	23.8	24	125	98	387.25

#### 25 Metre Coil, Black


0303	ID	OD mm	bar	mm	bar	£
100R6-12-25	3/4"	27.8	21	150	84	233.20
100R6-16-25	1"	32.5	20	205	80	303.80

#### 50 Metre Coils, Red

0303	ID	OD mm	bar	mm	bar	£
100R6-04-R-50	1/4"	13.5	28	65	112	144.10
100R6-06-R-50	3/8"	16.7	28	75	112	226.95
100R6-08-R-50	1/2"	20.6	28	100	112	310.85

#### 25 Metre Coils, Red

0303	ID	OD mm	bar	mm	bar	£
100R6-12-R-25	3/4"	27.8	21	150	84	233.20
100R6-16-R-25	1"	32.5	20	205	80	303.80

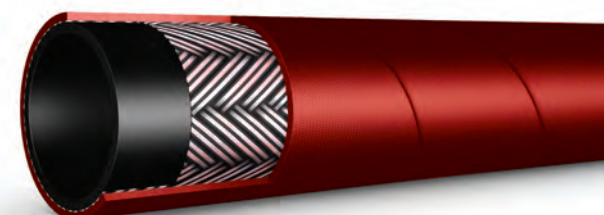

Hydraulics

Hydraulic QRC

Pneumatic QRC

Ind. Air Prep, Monitor & Test

KELM™ Pneumatics

Pneumatic & Vacuum Equipment

Valves

Ring Main Systems

Adaptors & Fittings

Stainless Steel

Malleable Iron

Hose, Tubing & Couplings

Clamps & Clips

Sprays & Adhesives

Blow Guns & Vacuum

Wash Down & Fuelling

Air Tools

Tools, Hardware & PPE